Bestware
Expertise in Stainless Steel

BESTWARE Hardware Production Co., Ltd.

Add: Block 8, No.6, Jianda Nan Road, Jiangmen, Guangdong, China

Email: info@bestware.net.cn

WhatsApp: +852 69422885

Wechat: +852 69422885

Tel: +86 750 3108801

Website YouTube WhatsApp Wechat

2025 V1.0



Expertise in Stainless Steel

BESTWARE

PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

www.bestware.net.cn

IN

2015

WE ACHIEVED THE **WORLD'S FIRST** MASS PRODUCTION OF ALL-STAINLESS COMMERCIAL FAUCET

WHO We Are

- Premier Solution Provider of One-stop Stainless Steel Commercial Faucets
- Pioneer of the Stainless Steel Revolution in the Industry
- Pursuer of Ultimate User Experience and Exceptional Product Quality
- Implementor of Sustainable Development
- A Young and Innovative Team Full of Vitality
- A Dedicated and Agile Startup Enterprise

Founded in 2003 (initially as Bailing Factory), Bestware is an innovative enterprise specializing in R&D, production, and sales. With 5 groundbreaking patents, we have become the most authoritative manufacturing expert with the strongest technological R&D capabilities in the field of stainless steel commercial faucets.

In 2013, Bestware predicted stainless steel's rise in commercial faucets, anticipating brass's replacement. By 2015, we led the industry by mass producing all-stainless steel faucets (100% metal components utilize food-grade SUS304). We prioritize quality, customer needs, and ergonomics, delivering exceptional products.

As an innovative enterprise, Bestware boasts a young and dynamic team that specializes in the field of stainless steel materials. The company adopts a flat management structure, enabling it to flexibly respond to market and customer demands, and quickly launch new products and customized solutions.









WRAS



CUPC



SGS



EUROPEAN PATENT



LEAD FREE



NSF61



UTILITY PATENT / INVENTION PATENT

EXPERTISE IN STAINLESS STEEL

2003

Andy Huang established the factory (formerly known as Bailing Factory).



2007

Established the Bestware brand, derived from “Best Hardware”. In the commercial plumbing industry, the finest hardware material is stainless steel—our specialty. Durable, eco-friendly and healthy, it is poised to replace brass, symbolizing our mission to lead industry innovation and sustainability.

2015

Achieved a global breakthrough by mass-producing the first all-stainless steel commercial faucets, breaking the brass faucet monopoly and inaugurating a new era for stainless steel commercial faucets.



2016

Established Bestware’s headquarters.



2019

Launched the sensor series stainless steel faucets, entering the electronic sensor product market.



2020

Launched the world’s first stainless steel sensor drinking bubbler for public spaces, designed to meet public health demands during the pandemic.



Introduced the industry-leading French ATEQ leak detection instrument as the quality backbone for our entire product line, ensuring a 100% leak-proof rate.



2021



Launched the adjustable timed flow stainless steel metering faucet, enabling customizable water flow delay (6-16 seconds) —the longest range in public faucets.



Established Bisource Hardware Manufacturing Co., Ltd., achieving an integrated one-stop operation from R&D, production to sales.

2022

Launched the thermostatic sensor faucet/2 in 1 soap and the washing multifunctional thermostatic sensor faucet. These products are the world’s most precise temperature-controlled and highest anti-scald rating integrated public sensor faucets.



2024



Launched the commercial sparkling water dispenser (4 in 1), an under-sink water dispenser that combines hot, ambient, cold, and sparkling water functionalities in one.

WHY

choose stainless steel

The multiple advantages of stainless steel **(listed below)**, combined with the increasing implementation of restrictions on brass (lead) usage and chrome plating bans across various countries, are driving a stainless steel revolution in the industry. Stainless steel is gradually replacing brass as the preferred material for the next generation of commercial faucets.

Lead-free Safety
Ensures water quality and health, free from lead and the corrosion caused by brass patina.

Durable and Resilient
With significantly higher hardness than brass, it is more suitable for high-frequency, high-wear commercial or public environments.

Eco-friendly
100% recyclable, with no need for electroplating during production, unlike brass, which generates substantial environmental pollution.

Easy to Clean
With a smooth, oxidation-resistant surface, stainless steel is less prone to dirt buildup and is easy to clean, becoming shinier with every wash.

High Long-term Value
Though initially more expensive, stainless steel faucets offer superior durability, corrosion resistance, and easier maintenance, resulting in a longer lifespan and lower lifetime costs. Additionally, their lead- and patina-free properties contribute significant health benefits, making them a smart long-term investment.



Bestware firmly believed from early on that stainless steel would ultimately replace brass. In 2013, we made the bold decision to choose it as the material for the new generation of commercial faucets. By 2015, we became the world's first company to achieve mass production of all-stainless steel commercial faucets, pioneering this shift in the industry. Over the past decade, through relentless refinement and innovation, our products have firmly established themselves as a benchmark for quality in the industry, gaining widespread trust and recognition from our customers. Today, we are renowned for delivering top-tier stainless steel commercial faucets and continue to lead the industry toward sustainable development.



WHY

choose Bestware

Enterprise Advantages

Solution Provider
A pioneer in the stainless steel revolution within the industry, and a leading provider of one-stop commercial stainless steel faucet solution.



Technological Leadership
With over a decade of accumulated expertise in stainless steel commercial faucet technology, 100% independent innovation, and micron-level precision machining, Bestware stands as the most established manufacturer in the stainless steel industry.



Exceptional Quality
Comprehensive quality control system with full product inspection to ensure a 100% product pass rate before leaving the factory.



Sustainable Development
Our stainless steel products are lead-free, environmentally friendly, and recyclable, with no plating pollution during the manufacturing process. Additionally, we continuously improve production technology and efficiency to reduce energy consumption and emissions.



Product Advantages

Since its establishment, Bestware has always adhered to the principle of "solving industry pain points through product selling points", creating more value for customers. Below is an overview of our unique selling points.



Pre Rinse Faucet

Pain Points	Selling Points
Brass Contains Lead, Relatively Soft	SUS304 (Lead-free), Perfect for High-wear Commercial Use
High Hose Leakage Rate and Short Lifespan	Exclusive Stainless Steel Hose, 200K+ Rotations Under High Temp & Pressure
Low-power, Poor Ergonomics Spray Valve	Patented Dual-function Spray Valve for Powerful/Large-area Washing
Brass Valve Core with Poor Wear Resistance	Use SUS304, Wear-resistant/Leak-resistant/Low Replacement Frequency

Note: Suitable for European and American Style Models



Sensor Drinking Bubbler

Pain Points	Selling Points
Brass Contains Lead, Relatively Soft	SUS304 (Lead-free), Perfect for High-wear Public Use
Sensor Failure from Electromagnetic Interference	First Sensor Drinking Bubbler with 10 V/m EMI Resistance for Public Use
No Self-cleaning, Leading to Bacteria Growth	24-hour Auto-cleaning System for Hygienic Water Quality
Water Flow Instability During Pressure Fluctuations	Advanced Water Pressure Balancing for Stable Flow



Sensor Faucet

Pain Points	Selling Points
Manual Temp Control, Lacks Precision	Smart Temperature Control with Precision, Set via Digital Glass Panel (±1°C)
Low Sensitivity, Higher Failure Rates	High-sensitivity Activation in 0.2 s and Closure in 1 s with Fast Response
Unstable Temp, Hot and Cold Fluctuations	Smart Sensing for Precise Temp Control, Unaffected by Water Pressure
No Check Valve, Complicated Maintenance	Built-in Check Valve for Auto Shutoff, No Main Valve Shut-off (Model WST Only)



Commercial Sparkling Water Dispenser

Pain Points	Selling Points
Limited Functionality, Requires Multiple Devices	Multi-function for Hot/Chilled/Sparkling/Ambient Water (4 in 1)
Low Water Output, Unsuitable for Commercial Use	200 cups/h Chilled Water (200 ml/cup), Serving Commercial Needs
Poor Taste of Sparkling Water	Advanced Molecular Fusion for Smooth, Lasting Sparkling Taste
Lack of Energy-saving Design, Leading to Waste	Steam Recovery System for Energy Savings and Reduced Consumption
Lacking Safety Protection, Burn Hazard	Insulated Dual Pipelines for Heat Retention, Keeping Faucet Cool



Metering Faucet

Pain Points	Selling Points
Brass Contains Lead, Relatively Soft	SUS304 (Lead-free), Perfect for High-wear Public Use
No Flow Time Adjustment, Unstable Flow	Adjustable Water Flow (6-16 Seconds) with Smooth, Stable Flow
Hard to Press, Inconvenient for Public Use	Easy to Press, Suitable for All Ages, Especially Seniors and Kids

✓ Our Commitments

97%+ Product Satisfaction Upon Receipt by Customers

100% 304/316 Stainless Steel (Unless Specified Otherwise)

100% Product Qualification Rate at Factory Shipment

100% Customer Complaint Resolution Rate



Take Bestware for a spin, and it'll be your go-to forever!

CONTENTS

STAINLESS COMMERCIAL FAUCET



PRE RINSE FAUCET 01

European Style 02

American Style 14

Affordable Luxury Style 24

Economy Style 28



SPRAY VALVE 33

Dual Function 33

Single Function 34



DRINKING TAP 35

Drinking Bubbler 36

Bottle Filler 42

Drinking Fountain 47



SENSOR FAUCET 51

Deck Mount 52

Wall Mount 55



METERING FAUCET 57

Deck Mount 59

Wall Mount 60



MANUAL FAUCET 61

European Style 62

American Style 65

Economy Style 69

Other Styles 71



GLASS RINSER 75

Compact Body 76

Long Body 76



LABORATORY FAUCET 77

Aerator 77

Serrated Tip 79



WASH SINK 81

Knee Operated 81

Drinking Series 82

Sensor Series 88



COMMERCIAL SPARKLING WATER DISPENSER 89

PRE RINSE FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features	
Spray Valve	Dual-function (Standard)	Two modes for powerful washing and large-area washing
		24 precisely designed angles ensure uniform flow and broad coverage
		Reduces water hammer, protecting water piping
		Ergonomic hydraulic buffer reduces fatigue during extended use
	Single-function (Optional)	Single mode for powerful washing
Hose	Material	Inner with EPDM, outer with SUS304, heat-resistant up to 95°C
	Structure	360° rotating head and universal ball joint, up to 150 kg pulling force
	Lifespan	Up to 200,000+ rotations and swings
Valve Core	Material	SUS304 slow-opening valve core, up to 200,000+ cycles
Aerator	Kind	Neoperl, up to 30% water savings, and prevents splash



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

EUROPEAN STYLE





100% SUS304 WETTED PARTS



EF100

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



EF200

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



EF250

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	9.84"(250 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



EF200C

Mini Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

EH100

Standard Style Dual Deck Mount Pre Rinse Faucet



Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 6"(153 mm)



100% SUS304 WETTED PARTS

EH200

Standard Style Dual Deck Mount Pre Rinse Faucet



Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 6"(153 mm)



100% SUS304 WETTED PARTS

EH250

Standard Style Dual Deck Mount Pre Rinse Faucet



Attributes	Details
Add-on Swing Nozzle	9.84"(250 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 6"(153 mm)



100% SUS304 WETTED PARTS

EH200C

Mini Style Dual Deck Mount Pre Rinse Faucet



Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 6"(153 mm)



100% SUS304 WETTED PARTS



ED100

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



ED200

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



ED250

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	9.84"(250 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



ED200C

Mini Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



EW100

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 5.91"(150 mm)



100% SUS304 WETTED PARTS



EW200

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 5.91"(150 mm)



100% SUS304 WETTED PARTS



EW250

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	9.84"(250 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 5.91"(150 mm)



100% SUS304 WETTED PARTS

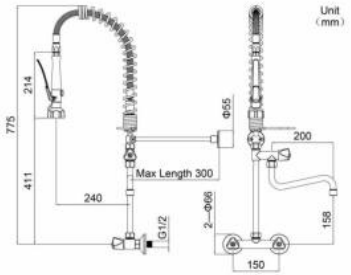

EW200C

Mini Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 5.91"(150 mm)



100% SUS304 WETTED PARTS



ES100

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS



ES200

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS



ES250

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	9.84"(250 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS



ES200C

Mini Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	7.87"(200 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm

PRE RINSE FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features	
Spray Valve	Dual-function (Standard)	Two modes for powerful washing and large-area washing
		24 precisely designed angles ensure uniform flow and broad coverage
		Reduces water hammer, protecting water piping
		Ergonomic hydraulic buffer reduces fatigue during extended use
	Single-function (Optional)	Single mode for powerful washing
Hose	Material	Inner with EPDM, outer with SUS304, heat-resistant up to 95°C
	Structure	360° rotating head and universal ball joint, up to 150 kg pulling force
	Lifespan	Up to 200,000+ rotations and swings
Valve Core	Material	SUS304 rapid screw valve core, up to 200,000+ cycles
Aerator	Kind	Neoperl, up to 30% water savings, and prevents splash



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

AMERICAN STYLE





100% SUS304 WETTED PARTS



AA100

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



AA106

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



AA112

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



AA106C

Mini Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

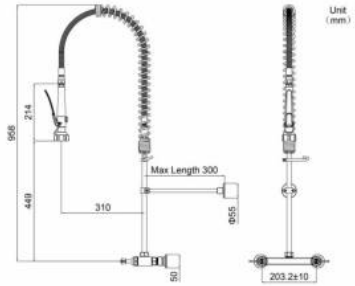

AW800

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2±10 mm)



100% SUS304 WETTED PARTS



AW806

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2±10 mm)



100% SUS304 WETTED PARTS



AW812

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2±10 mm)



100% SUS304 WETTED PARTS

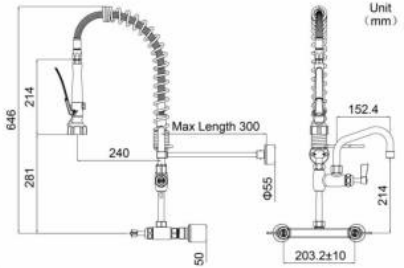

AW806C

Mini Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2±10 mm)



100% SUS304 WETTED PARTS



AD100

Standard Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 4"(101.6 mm)-8"(203.2 mm)



100% SUS304 WETTED PARTS



AD106

Standard Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 4"(101.6 mm)-8"(203.2 mm)



100% SUS304 WETTED PARTS



AD112

Standard Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 4"(101.6 mm)-8"(203.2 mm)



100% SUS304 WETTED PARTS

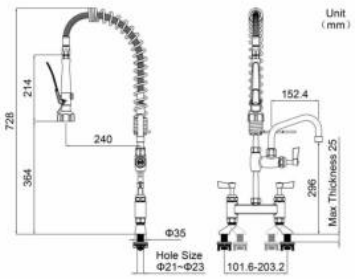

AD106C

Mini Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 4"(101.6 mm)-8"(203.2 mm)



100% SUS304 WETTED PARTS



AS100

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Neoperl Aerator Water Flow	/
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS



AS106

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS



AS112

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS



AS106C

Mini Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	6"(152.4 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm

PRE RINSE FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features	
Spray Valve	Dual-function (Standard)	Two modes for powerful washing and large-area washing
		24 precisely designed angles ensure uniform flow and broad coverage
		Reduces water hammer, protecting water piping
		Ergonomic hydraulic buffer reduces fatigue during extended use
	Single-function (Optional)	Single mode for powerful washing
Hose	Material	Inner with EPDM, outer with SUS304, heat-resistant up to 95°C
	Structure	360° rotating head and universal ball joint, up to 150 kg pulling force
	Lifespan	Up to 200,000+ rotations and swings
Valve Core	Material	SEDAL ceramic valve core, up to 140,000+ cycles
Aerator	Kind	Neoperl, up to 30% water savings, and prevents splash



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

AFFORDABLE LUXURY STYLE





100% SUS304 WETTED PARTS



BH110

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	10"(254 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

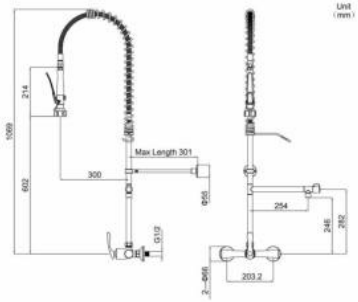

BW110

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	10"(254 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2 mm)

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS
AFFORDABLE LUXURY STYLE



100% SUS304 WETTED PARTS

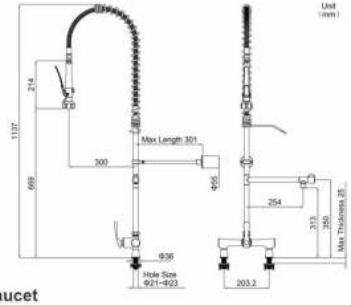

BD110

Standard Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	10"(254 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 8"(203.2 mm)

PRE RINSE FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features	
Spray Valve	Single-function	Single mode for powerful washing
Hose	Material	Inner with EPDM, outer with SUS304, heat-resistant up to 95°C
	Structure	Single 360° rotating head, up to 150 kg pulling force
Valve Core	Material	SUS304 fast-opening ceramic valve core, up to 200,000+ cycles
Aerator	Function	Prevents splash



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

ECONOMY STYLE





80% SUS304 WETTED PARTS



ECD100

Standard Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 8"(203.2 mm)



80% SUS304 WETTED PARTS



ECD110

Standard Style Dual Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	10"(254 mm)
Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 8"(203.2 mm)



80% SUS304 WETTED PARTS



ECH100

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



80% SUS304 WETTED PARTS



ECH110

Standard Style Deck Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	10"(254 mm)
Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



80% SUS304 WETTED PARTS



ECW100

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	/
Aerator Water Flow	/
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2 mm)



80% SUS304 WETTED PARTS



ECW110

Standard Style Wall Mount Pre Rinse Faucet

Attributes	Details
Add-on Swing Nozzle	10"(254 mm)
Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-Hole Dimension 8"(203.2 mm)

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS
ECONOMY STYLE





Flow Rate Table

100% SUS304 WETTED PARTS



Powerful Washing

Large-area Washing

BWSG-SSE

Patented Dual-function Spray Valve

Key Parts	Features	
Spray Valve	Dual-function	Two modes for powerful washing and large-area washing
		24 precisely designed angles ensure uniform flow and broad coverage
		Reduces water hammer, protecting water piping
		Ergonomic hydraulic buffer reduces fatigue during extended use
	Material	SUS304, up to 200,000+ cycles



Flow Rate Table

100% SUS304 WETTED PARTS



Powerful Washing

BWSG-SSJ

Single-function Spray Valve

Key Parts	Features	
Spray Valve	Single-function	Single mode for powerful washing
		Reduces water hammer, protecting water piping
		Ergonomic hydraulic buffer reduces fatigue during extended use
	Material	SUS304, up to 200,000+ cycles

Key Parts	Features
Material	SUS304 (lead-free), perfect for high-wear public use
Activation Time	High-sensitivity activation in 0.2 s and closure in 1 s with fast response
EMI Resistance	First sensor drinking bubbler with 10 V/m EMI resistance for public
Auto-cleaning	24-hour auto-cleaning system for hygienic water quality
Water Cutoff Protection	Automatic shutoff for cold water loss, power failure, or accidental activation
Water Flow	Advanced water pressure balancing for stable flow
Valve Core Lifepan	Up to 1,000,000+ cycles



Power Supply Options:

① Battery Power Supply

② Main Power Supply



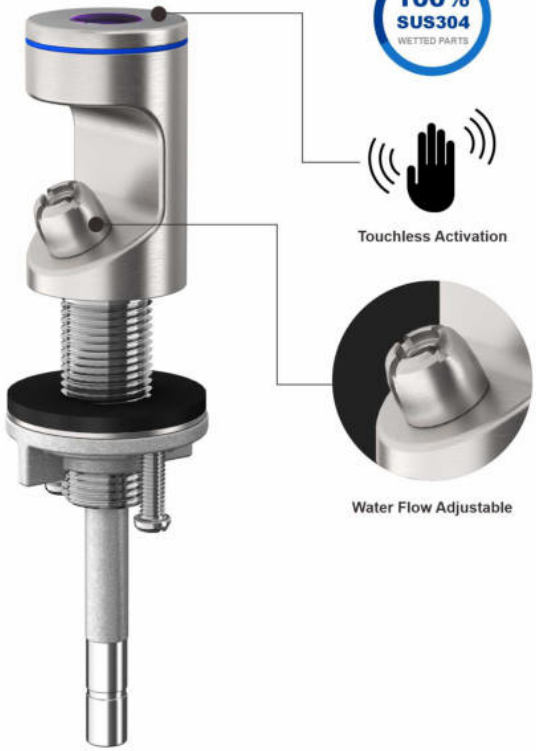

ABUBAB/ABUBAM

Sensor Deck Mount Drinking Bubbler with Battery Power Supply/Main Power Supply

Attributes	Details
Switching Mechanism	Touchless, hand wave sensor activation and deactivation
EMI Level	10 V/m
Power Supply Mode	Available in battery or main power supply options
Water Flow Height	Adjustable
Hole Size	Φ21-23 mm



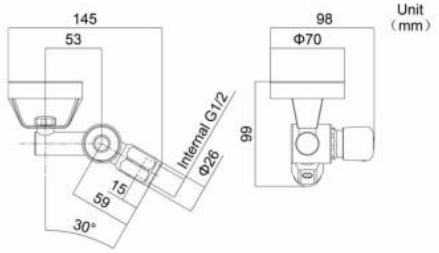

BUBS-PB

Manual Wall Mount Drinking Bubbler with Push Button

Attributes	Details
Switching Mechanism	Press for instant water flow, stops when released
Compatible Installation Angle	30°
Water Flow Height	Adjustable
Hole Size	G1/2



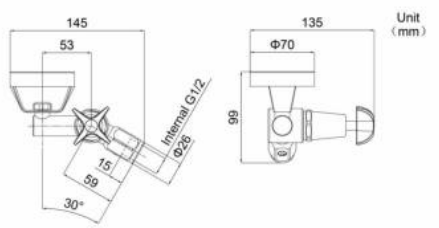

BUBS-CH

Manual Wall Mount Drinking Bubbler with Vandal Resistant Cross Handle

Attributes	Details
Switching Mechanism	Switch for instant water flow, stops when released
Compatible Installation Angle	30°
Water Flow Height	Adjustable
Hole Size	G1/2



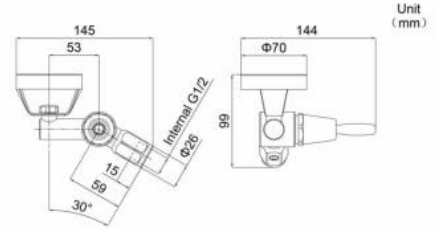

BUBS-LH

Manual Wall Mount Drinking Bubbler with Lever Handle

Attributes	Details
Switching Mechanism	Swing for instant water flow, stops when released
Compatible Installation Angle	30°
Water Flow Height	Adjustable
Hole Size	G1/2



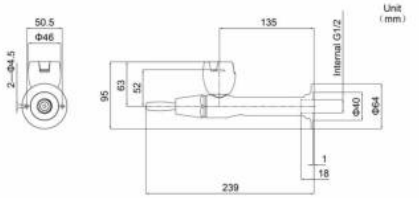

BUBL-LH

Manual Wall Mount Drinking Bubbler with Lever Handle

Attributes	Details
Switching Mechanism	Swing for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to bottle filler
Water Flow Height	Adjustable
Hole Size	G1/2



100% SUS304 WETTED PARTS

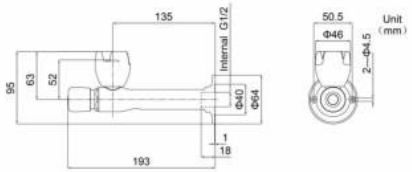

BUBL-PB

Manual Wall Mount Drinking Bubbler with Push Button

Attributes	Details
Switching Mechanism	Press for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to bottle filler
Water Flow Height	Adjustable
Hole Size	G1/2



100% SUS304 WETTED PARTS

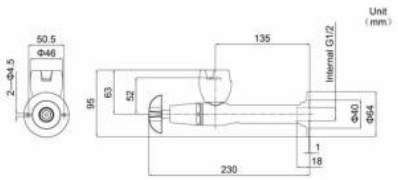

BUBL-CH

Manual Wall Mount Drinking Bubbler with Vandal Resistant Cross Handle

Attributes	Details
Switching Mechanism	Switch for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to bottle filler
Water Flow Height	Adjustable
Hole Size	G1/2



100% SUS304 WETTED PARTS

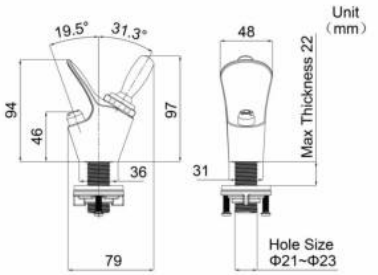

BUBMI-LH

Mini Manual Deck Mount Drinking Bubbler with Lever Handle

Attributes	Details
Switching Mechanism	Swing for instant water flow, stops when released
Water Flow Height	Adjustable
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS

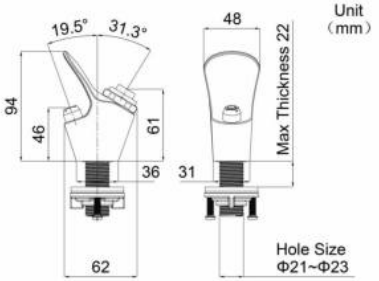

BUBMI-PB

Mini Manual Deck Mount Drinking Bubbler with Push Button

Attributes	Details
Switching Mechanism	Press for instant water flow, stops when released
Water Flow Height	Adjustable
Hole Size	Φ21-23 mm

Key Parts	Features
Material	SUS304 (lead-free), perfect for high-wear public use
Activation Time	High-sensitivity activation in 0.2 s and closure in 1 s with fast response
EMI Resistance	First sensor bottle filler with 10 V/m EMI resistance for public
Auto-cleaning	24-hour auto-cleaning system for hygienic water quality
Water Cutoff Protection	Automatic shutoff for cold water loss, power failure, or accidental activation
Water Flow	Advanced water pressure balancing for stable flow
Valve Core Lifepan	Up to 1,000,000+ cycles



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

BOTTLE FILLER





100% SUS304 WETTED PARTS

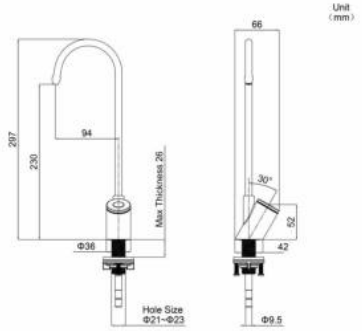

SBLTFB/SBLTFM

Sensor Deck Mount Bottle Filler

Attributes	Details
Switching Mechanism	Touchless activation, automatic shut-off upon removal
EMI Level	10 V/m
Power Supply Mode	Available in battery or main power supply options
Water Flow	Adjustable
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS

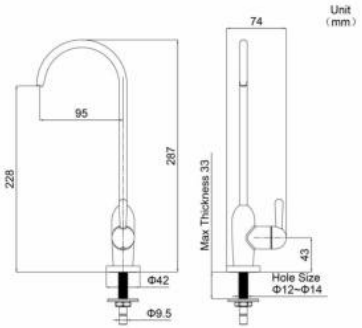

BLTFLT1

Manual Deck Mount Bottle Filler with Lever Handle

Attributes	Details
Switching Mechanism	Manual operation
Water Flow	Adjustable
Hole Size	Φ12-14 mm



100% SUS304 WETTED PARTS

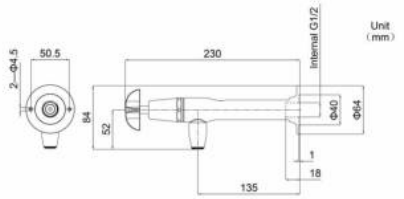

BLTFL-CH

Manual Wall Mount Bottle Filler with Vandal Resistant Cross Handle

Attributes	Details
Switching Mechanism	Switch for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to drinking bubbler
Water Flow Height	Adjustable
Hole Size	G1/2



100% SUS304 WETTED PARTS

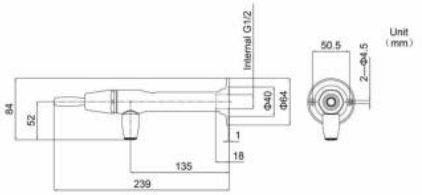

BLTFL-LH

Manual Wall Mount Bottle Filler with Lever Handle

Attributes	Details
Switching Mechanism	Swing for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to drinking bubbler
Water Flow Height	Adjustable
Hole Size	G1/2



100% SUS304 WETTED PARTS

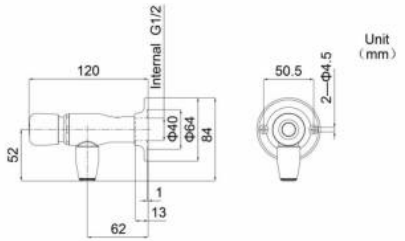

BLTFLM-PB

Mini Manual Wall Mount Bottle Filler with Push Button

Attributes	Details
Switching Mechanism	Press for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to drinking bubbler
Water Flow	Adjustable
Hole Size	G1/2



100% SUS304 WETTED PARTS

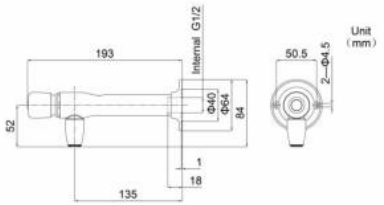

BLTFL-PB

Manual Wall Mount Bottle Filler with Push Button

Attributes	Details
Switching Mechanism	Press for instant water flow, stops when released
Nozzle Versatility	Interchangeable nozzle, converted to drinking bubbler
Water Flow Height	Adjustable
Hole Size	G1/2

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

BOTTLE FILLER

Power Supply Options:



① Battery Power Supply



② Main Power Supply

100% SUS304 WETTED PARTS



Touchless Activation



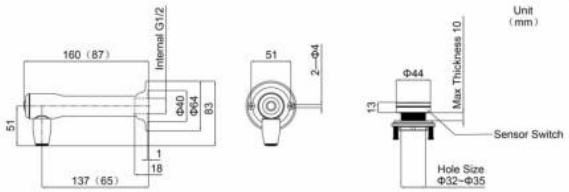



SLBLTFLB/SLBLTFLM

Mini Sensor Wall Mount Bottle Filler with Battery Power Supply/Main Power Supply



SBLTFLB/SBLTFLM

Sensor Wall Mount Bottle Filler with Battery Power Supply/Main Power Supply

Attributes	Details
Product Size	L=160/87 mm (optional)
Switching Mechanism	Touchless activation, automatic shut-off upon removal
EMI Level	10 V/m
Power Supply Mode	Available in battery or main power supply options
Water Flow Height	Adjustable
Hole Size	G1/2 (wall mounted), Φ32-35 mm (sensor switch)

100% SUS304 WETTED PARTS



Unit (mm)

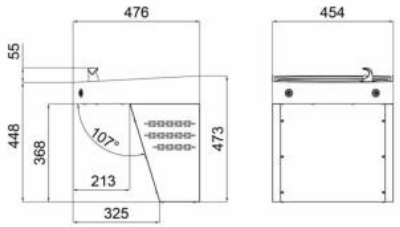

FONTCL2MSB

Drinking Fountain with Manual Operation

Attributes	Details
Operation Mode	Manual dual button operation (left and right)
Power Supply Mode	Available in main power supply
Water Flow Height	Adjustable
Water Flow Time	Adjustable in real-time, instant flow and delayed flow (1-99 seconds)
Function	Available in chilled and filtered water options

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

DRINKING FOUNTAIN

100% SUS304 WETTED PARTS



Unit (mm)

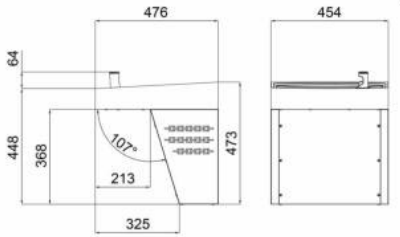

FONTCLSBM

Drinking Fountain with Sensor Operation

Attributes	Details
Operation Mode	Touchless, hand wave sensor activation and deactivation
EMI Level	10 V/m
Power Supply Mode	Available in main power supply
Water Flow Height	Adjustable
Function	Available in chilled and filtered water options



BFSCL2MSB

Drinking Fountain with Manual Drinking Bubbler and Sensor Bottle Filler

Attributes	Details
Operation Mode	Drinking bubbler (manual dual button operation) Bottle filler (touchless activation, automatic shut-off upon removal)
Power Supply Mode	Available in main power supply
Water Flow Height	Adjustable
Water Flow Time	Adjustable in real-time, instant flow and delayed flow (1-99 seconds)
Function	Available in chilled and filtered water options

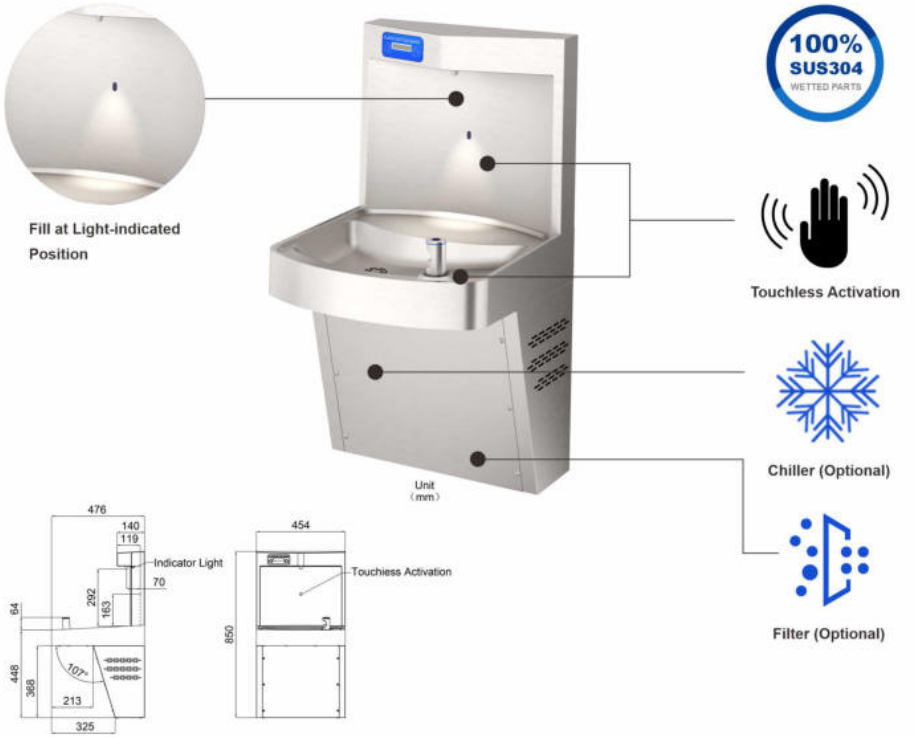

BFSCLSBM

Drinking Fountain with Sensor Drinking Bubbler and Sensor Bottle Filler

Attributes	Details
Operation Mode	Drinking bubbler (touchless, hand wave sensor activation and deactivation) Bottle filler (touchless activation, automatic shut-off upon removal)
EMI Level	10 V/m
Power Supply Mode	Available in main power supply
Water Flow Height	Adjustable
Function	Available in chilled and filtered water options

SENSOR FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features
Activation Time	High-sensitivity activation in 0.2 s and closure in 1 s with fast response
Temp Control	Smart temp control with precision, set via digital glass panel (±1°C)
Water Flow	Smart sensing for precise temp control, unaffected by water pressure
EMI Resistance	First sensor faucet with 10 V/m EMI resistance for public
Auto-cleaning	24-hour auto-cleaning system for hygienic water quality
Water Cutoff Protection	Automatic shutoff for cold water loss, power failure, or accidental activation
Special Function	2 in 1 hand washing and soap dispenser (Model 2DHMSTM only)



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

DECK MOUNT



2DHMSTM

Deck Mount Sensor Multifunctional Faucet (2 in 1 Hand Washing and Soap Dispenser) - White

2DHMSTM-S

Deck Mount Sensor Multifunctional Faucet (2 in 1 Hand Washing and Soap Dispenser) - Satin

Attributes	Details
Temp Control	Intelligent temperature control, temperature adjustable range (35-45°C)
EMI Level	10 V/m
Neoperl Aerator Water Flow	Available in 1.19 GPM (4.5 LPM)
Power Supply Mode	Available in main power supply
Soap Dispenser	2 Adjustable levels, low liquid warning
Administrator Key	Activates full cold or hot mode
Hole Size	Φ32-35 mm

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS



100% SUS304 WETTED PARTS

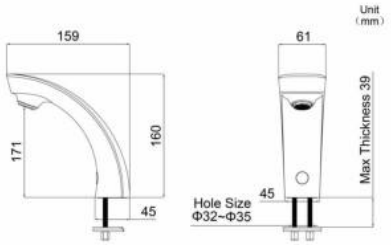

HMSTB/HMSTM

Deck Mount Sensor Faucet with Battery Power Supply/Main Power Supply

Attributes	Details
EMI Level	10 V/m
Sensor Mode	Available in instant flow
Neoperl Aerator Water Flow	Available in 1.19 GPM (4.5 LPM)
Power Supply Mode	Available in battery or main power supply options
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



ST210/260/310B ST210/260/310M

Deck Mount Single-sensor Faucet with Battery Power Supply/Main Power Supply

ST210/260/310BD ST210/260/310MD

Deck Mount Dual-sensor Faucet with Battery Power Supply/Main Power Supply

Attributes	Details
EMI Level	10 V/m
Sensor Mode	Available in instant flow or instant+long duration flow mode options
Neoperl Aerator Water Flow	Available in 1.01 GPM (3.8 LPM)
Power Supply Mode	Available in battery or main power supply options
Hole Size	Φ32-35 mm

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

DECK MOUNT



100% SUS304 WETTED PARTS

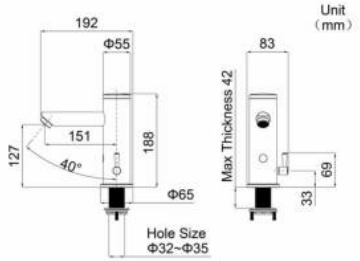

THMSTSB/THMSTSM

Deck Mount Sensor Faucet with Battery Power Supply/Main Power Supply

Attributes	Details
Temp Control	Manual temperature control with lever handle
EMI Level	10 V/m
Neoperl Aerator Water Flow	Available in 1.19 GPM (4.5 LPM)
Power Supply Mode	Available in battery or main power supply options
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS



DHMSTM

Deck Mount Sensor Faucet with Digital Temperature Control

Attributes	Details
Temp Control	Intelligent temperature control, temperature adjustable range (35-45°C)
EMI Level	10 V/m
Neoperl Aerator Water Flow	Available in 1.19 GPM (4.5 LPM)
Power Supply Mode	Available in main power supply
Hole Size	Φ32-35 mm
Administrator Key	Activates full cold or hot mode



WST200PD

Wall Mount Dual-sensor Faucet

(Instant Flow+Long Duration Flow Mode)

100% SUS304 WETTED PARTS

WST200P

Wall Mount Single-sensor Faucet

(Instant Flow)

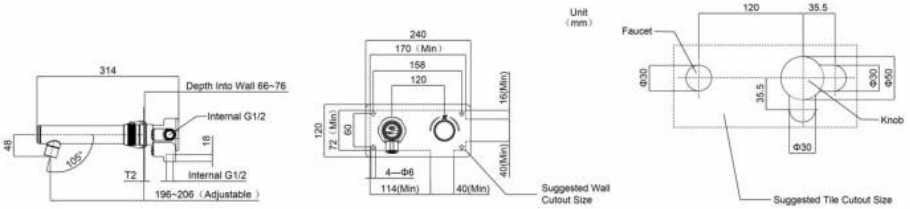

Attributes	Details
Temp Control	Manual temperature control
EMI Level	10 V/m
Sensor Mode	Available in instant flow or instant+long duration flow mode options
Neoperl Aerator Water Flow	Available in 1.01 GPM (3.8 LPM)
Power Supply Mode	Available in battery supply
Built-in Check Valve	Auto shutoff, no need to shut-off main valve for maintenance
Hole Size	170×60 mm

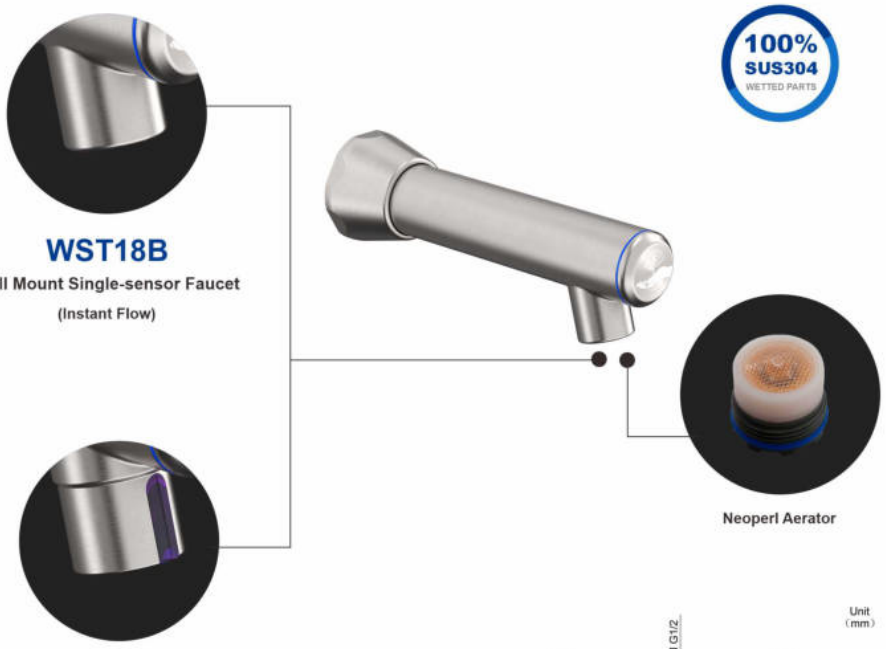

WST18B

Wall Mount Single-sensor Faucet

(Instant Flow)

WST18BD

Wall Mount Dual-sensor Faucet

(Instant Flow+Long Duration Flow Mode)

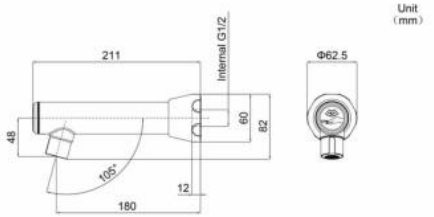

Attributes	Details
EMI Level	10 V/m
Sensor Mode	Available in instant flow or instant+long duration flow mode options
Neoperl Aerator Water Flow	Available in 1.01 GPM (3.8 LPM)
Power Supply Mode	Available in battery supply
Built-in Check Valve	Auto shutoff, no need to shut-off main valve for maintenance
Hole Size	G1/2

METERING FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features
Material	SUS304 (lead-free), perfect for high-wear public use
Water Flow Time	Adjustable water flow (6-16 seconds) with smooth, stable flow
Kind	Easy to press, ideal for all ages, especially seniors and children
Valve Core Lifepan	Up to 200,000+ cycles



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

DECK MOUNT

100% SUS304 WETTED PARTS



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS



100% SUS304 WETTED PARTS

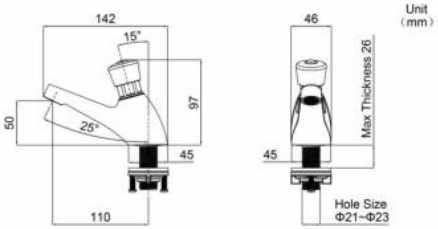

BWPT6PB/BWPT16PB

Deck Mount Metering Faucet with Push Button

Attributes	Details
Water Flow Time	Factory preset 6 or 16 seconds, adjustable from 6-16 seconds
Neoperl Aerator Water Flow	Unlimited Flow
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS

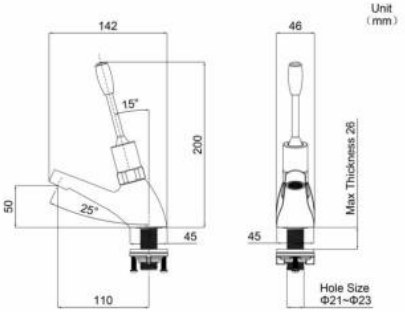

BWPT6L/BWPT16L

Deck Mount Metering Faucet with Lever Handle

Attributes	Details
Water Flow Time	Factory preset 6 or 16 seconds, adjustable from 6-16 seconds
Neoperl Aerator Water Flow	Unlimited Flow
Hole Size	Φ21-23 mm

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS



100% SUS304 WETTED PARTS

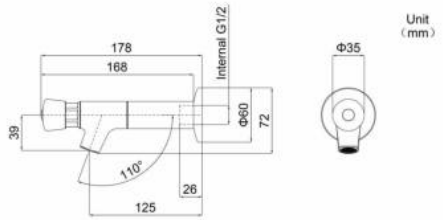

BWBT6PB/BWBT16PB

Wall Mount Metering Faucet with Push Button

Attributes	Details
Water Flow Time	Factory preset 6 or 16 seconds, adjustable from 6-16 seconds
Neoperl Aerator Water Flow	Unlimited Flow
Hole Size	G1/2



100% SUS304 WETTED PARTS

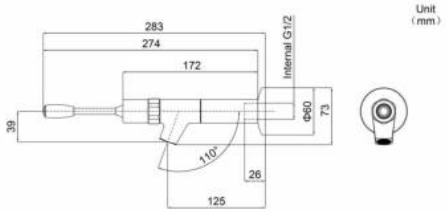

BWBT6L/BWBT16L

Wall Mount Metering Faucet with Lever Handle

Attributes	Details
Water Flow Time	Factory preset 6 or 16 seconds, adjustable from 6-16 seconds
Neoperl Aerator Water Flow	Unlimited Flow
Hole Size	G1/2

Key Parts	Features
Material	SUS304
Aerator	Neoperl, up to 30% water savings, and prevents splash
Valve Core Material	SUS304 slow-opening valve core
Valve Core Lifepan	Up to 200,000+ cycles



100% SUS304 WETTED PARTS



Unit (mm)

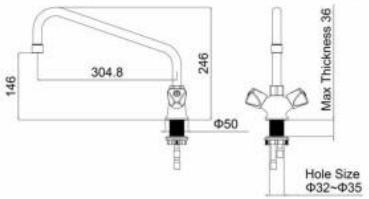

EF112S

Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

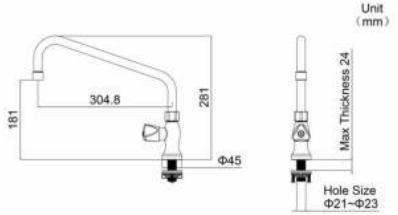

ES112S

Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm



100% SUS304 WETTED PARTS

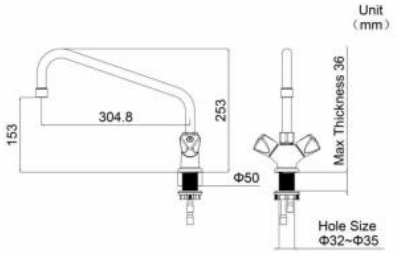

ED112S

Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

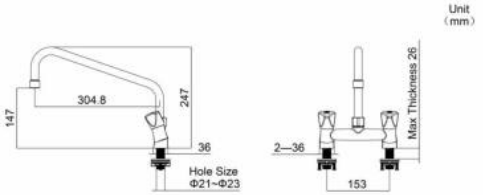

EH112S

Dual Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 6"(153 mm)



100% SUS304 WETTED PARTS

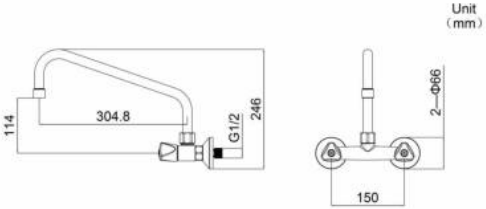

EW112S

Wall Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-hole Dimension 5.91"(150 mm)

Key Parts	Features
Material	SUS304
Aerator	Neoperl, up to 30% water savings, and prevents splash
Valve Core Material	SUS304 rapid screw valve core
Valve Core Lifepan	Up to 200,000+ cycles



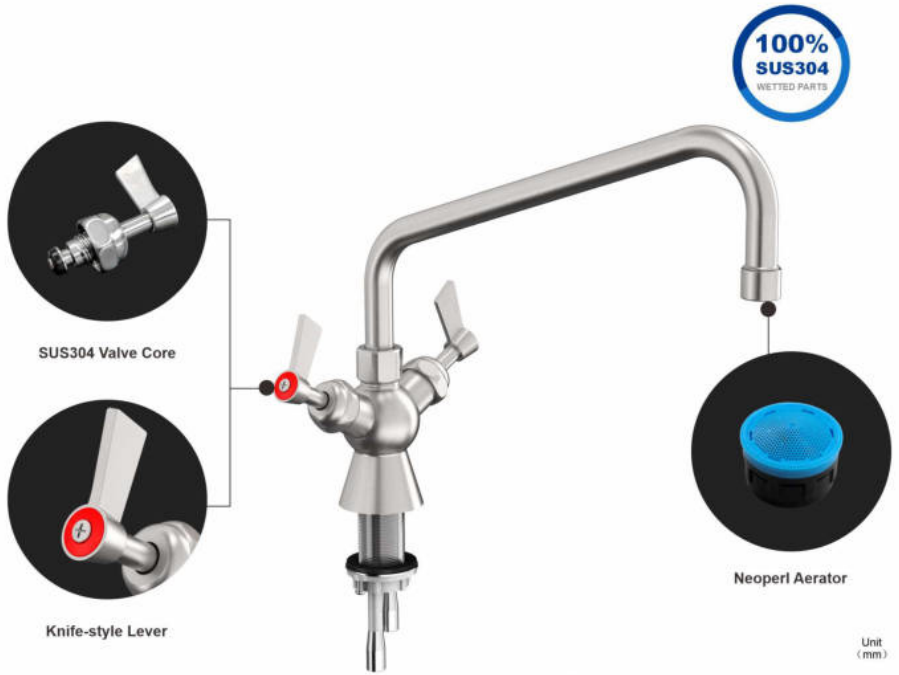

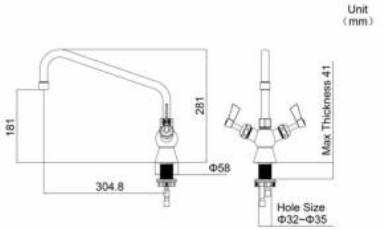

AA112S

Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

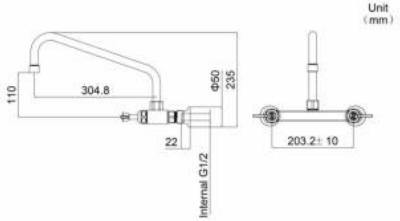

AW812S

Wall Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-hole Dimension 8"(203.2±10 mm)



100% SUS304 WETTED PARTS

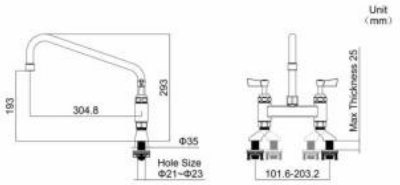

AD112S

Dual Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	12"(304.8 mm)
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 4"(101.6 mm)-8"(203.2 mm)



100% SUS304 WETTED PARTS

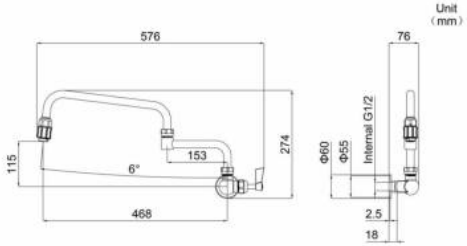

DJPF-SW

Wall Mount Manual Faucet

Attributes	Details
Swing Nozzle	18.39"(467 mm) Dual-joint Extended Length
Neoperl Flow Straightener	Available in 3.96 GPM (15 LPM)
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	G1/2



100% SUS304 WETTED PARTS

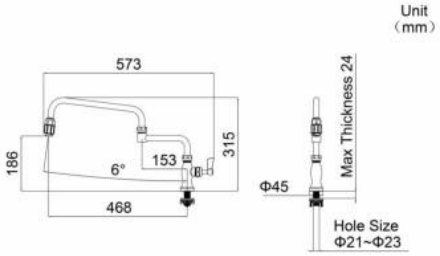

DJPF-SD

Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	18.39"(467 mm) Dual-joint Extended Length
Neoperl Flow Straightener	Available in 3.96 GPM (15 LPM)
Temperature Control	Single-handle Single-control Cold Water Only
Hole Size	Φ21-23 mm

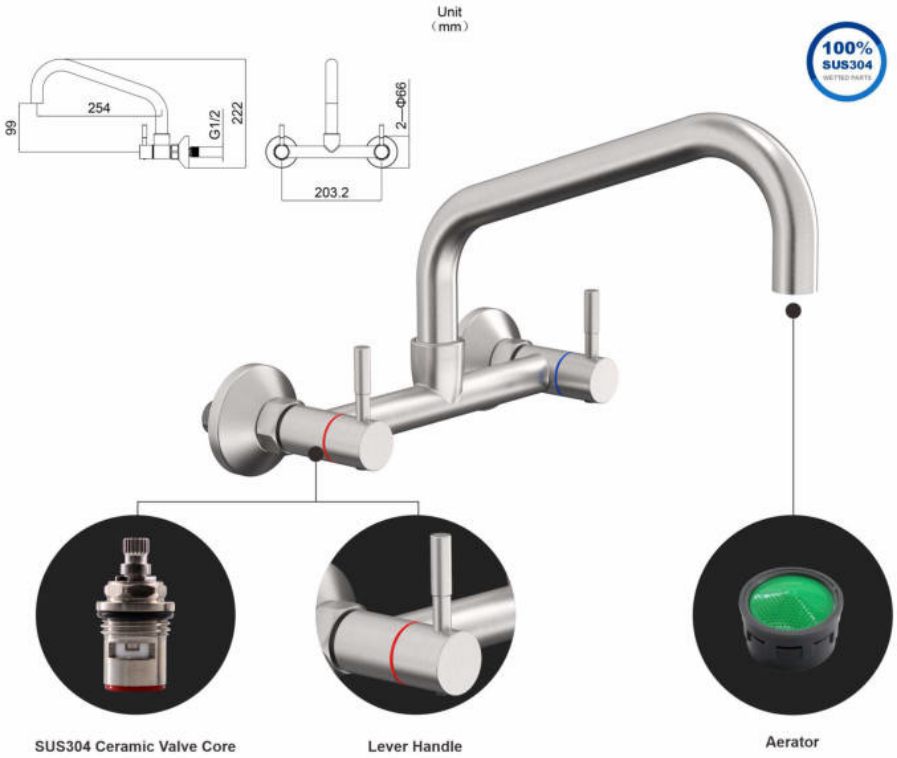

ECW110S

Wall Mount Manual Faucet

Attributes	Details
Swing Nozzle	10"(254 mm)
Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	G1/2, Hole-to-hole Dimension 8"(203.2 mm)



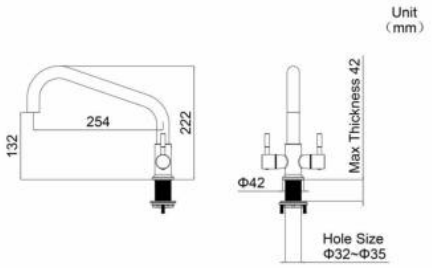

ECH110S

Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	10"(254 mm)
Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



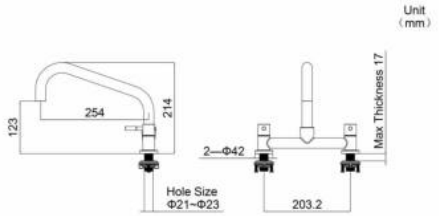

ECD110S

Dual Deck Mount Manual Faucet

Attributes	Details
Swing Nozzle	10"(254 mm)
Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Hole Size	Φ21-23 mm, Hole-to-hole Dimension 8"(203.2 mm)

MANUAL FAUCET

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

Key Parts	Features
Material	SUS304
Aerator	Neoperl, up to 30% water savings, and prevents splash
Valve Core Material	Sedal Thermostatic Mixing Valve Core
Valve Core Lifepan	Up to 1,000,000+ cycles



Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

OTHER STYLES



100% SUS304 WETTED PARTS

Unit (mm)

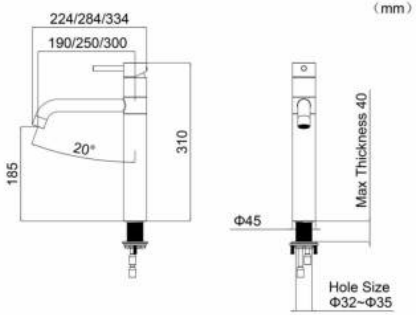

BTLT190/BTLT250/BTLT300

Deck Mount Manual Faucet

Attributes	Details
Product Size	H=310 mm , L=190/250/300 mm (Optional) Swing Nozzle
Neoperl Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

Unit (mm)

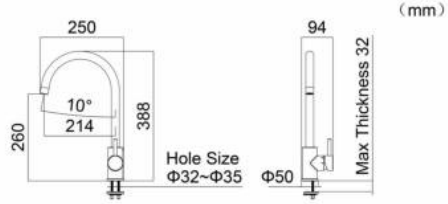

GSMIX392

Deck Mount Manual Faucet

Attributes	Details
Product Size	H=388 mm, L=214 mm Swing Nozzle
Neoperl Aerator Water Flow	Available in 3.96 GPM (15 LPM)
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

Unit (mm)

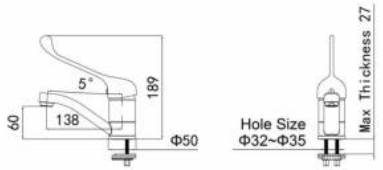

BWLBMIX

Deck Mount Manual Faucet with Extended Lever Handle

Attributes	Details
Swing Nozzle	138 mm
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

Unit (mm)

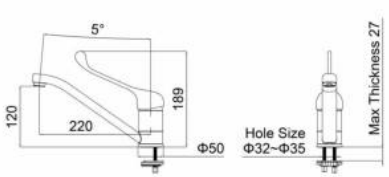

BWLSMIX

Deck Mount Manual Faucet with Extended Lever Handle

Attributes	Details
Swing Nozzle	220 mm
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

Unit (mm)

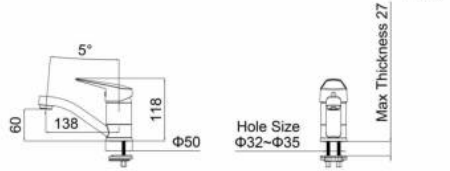

BWBMIX

Deck Mount Manual Faucet with Lever Handle

Attributes	Details
Swing Nozzle	138 mm
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm



100% SUS304 WETTED PARTS

Unit (mm)

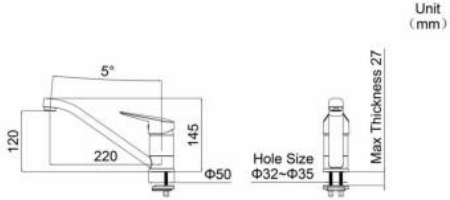

BWSMIX

Deck Mount Manual Faucet with Lever Handle

Attributes	Details
Swing Nozzle	220 mm
Neoperl Aerator Water Flow	Available in 2.11 GPM (8 LPM) or 3.96 GPM (15 LPM) Options
Temperature Control	Single-handle Dual-control Hot and Cold Adjustment
Hole Size	Φ32-35 mm

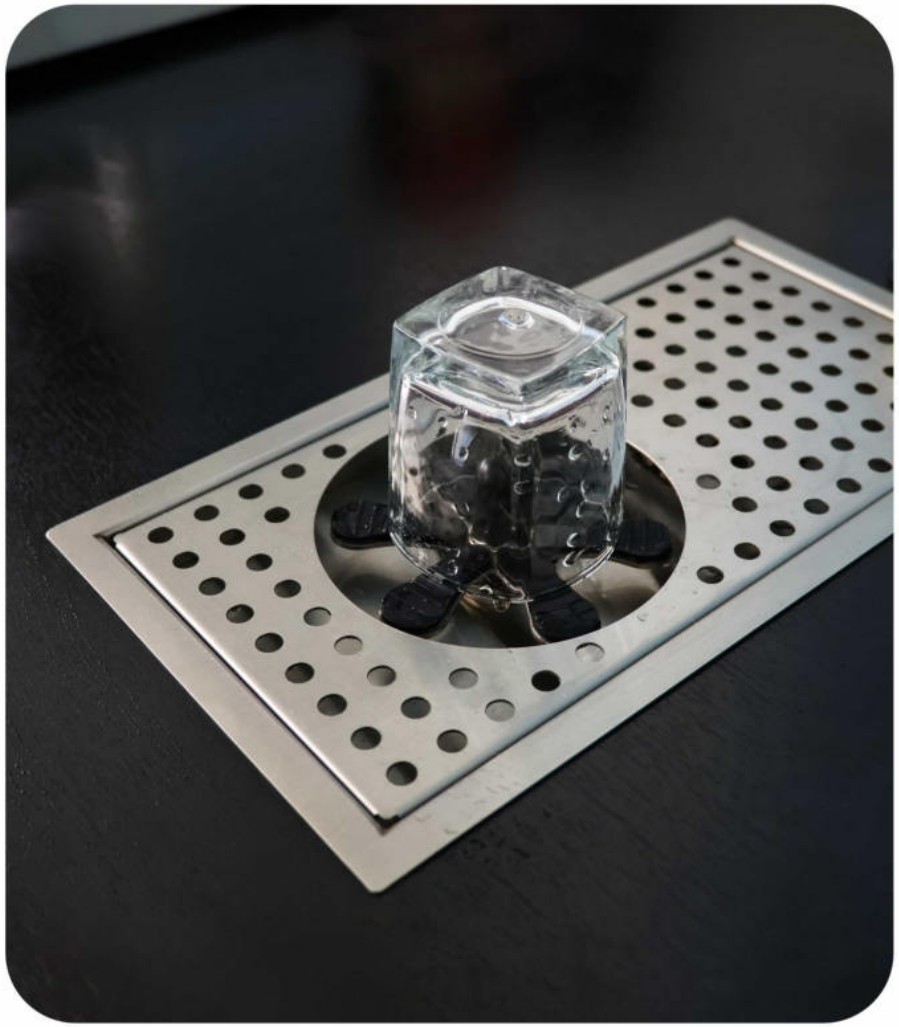

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

GLASS RINSER



100% SUS304 WETTED PARTS

Unit (mm)

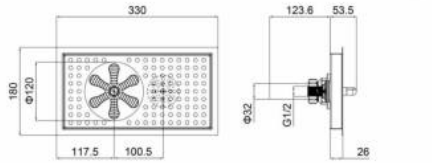

TR330

Glass Rinser with Compact Body Drain Tray

Attributes	Details
Material	SUS304
Valve Core Material	SUS304
Silicone padding	Silicone anti-collision
Water Spray Mode	Powerful blade-style rotating
Hole Size	308×158 mm



100% SUS304 WETTED PARTS

Unit (mm)

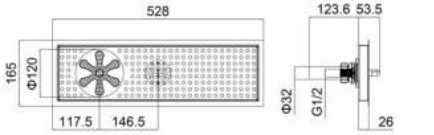

TR528

Glass Rinser with Long Body Drain Tray

Attributes	Details
Material	SUS304
Valve Core Material	SUS304
Silicone padding	Silicone anti-collision
Water Spray Mode	Powerful blade-style rotating
Hole Size	508×145 mm

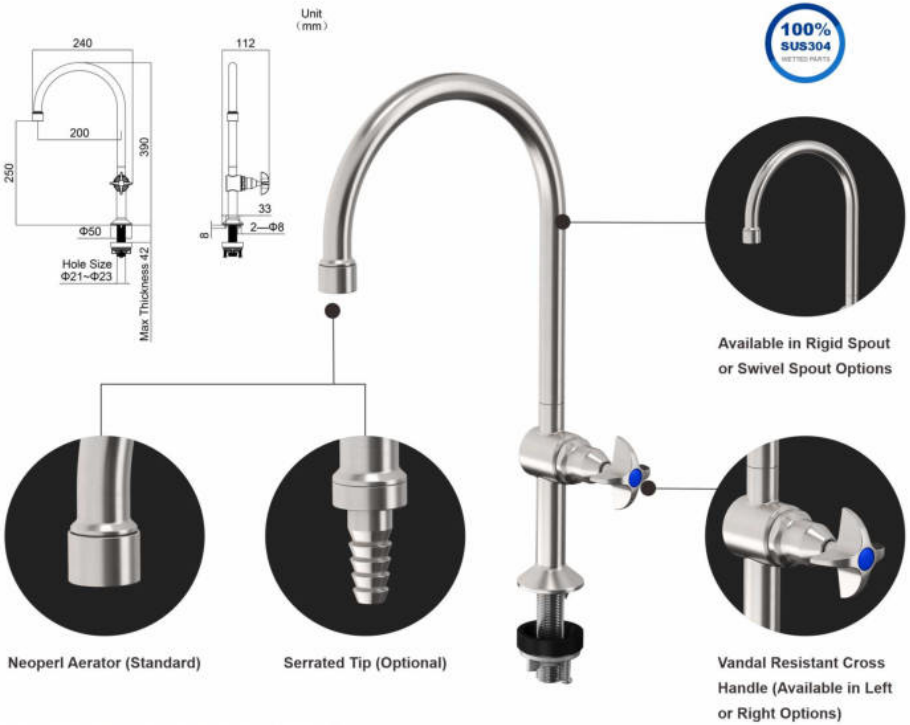

LABG16L-A/LABG16R-A

Laboratory Faucet Rigid Outlet with Aerator (Left/Right Side Available)

LABSG16L-A/LABSG16R-A

Laboratory Faucet Swivel Outlet with Aerator (Left/Right Side Available)

Attributes	Details
Nozzle Outlet Type	Neoperl Aerator (optional serrated tip)
Neoperl Aerator Water Flow	Available in 1.58 GPM (6 LPM)
Spout Options	Available in rigid or swing spout options
Handle	Available in left or right options
Hole Size	Φ21-23 mm



100% SUS304



LABG08L-A/LABG08R-A

Laboratory Faucet Rigid Outlet with Aerator/Add-on Nozzle (Left/Right Side Available)

LABSG08L-A/LABSG08R-A

Laboratory Faucet Swivel Outlet with Aerator/Add-on Nozzle (Left/Right Side Available)

Attributes	Details
Nozzle Outlet Type	Neoperl Aerator (optional serrated tip)
Neoperl Aerator Water Flow	Available in 1.58 GPM (6 LPM)
Spout Options	Available in rigid or swing spout options
Handle	Available in left or right options
Hole Size	Φ21-23 mm



100% SUS304



LAB26-A

Laboratory Faucet with Aerator

Attributes	Details
Nozzle Outlet Type	Neoperl Aerator (optional serrated tip)
Neoperl Aerator Water Flow	Available in 1.58 GPM (6 LPM)
Hole Size	Φ21-23 mm



LABG16L-TN/LABG16R-TN

Laboratory Faucet Rigid Outlet with Serrated Tip (Left/Right Side Available)

LABSG16L-TN/LABSG16R-TN

Laboratory Faucet Swivel Outlet with Serrated Tip (Left/Right Side Available)

Attributes	Details
Nozzle Outlet Type	Serrated tip (optional neoperl aerator)
Spout Options	Available in rigid or swing spout options
Handle	Available in left or right options
Hole Size	Φ21-23 mm





LABG08L-TN/LABG08R-TN

Laboratory Faucet Rigid Outlet with Serrated Tip/Add-on Nozzle (Left/Right Side Available)

LABSG08L-TN/LABSG08R-TN

Laboratory Faucet Swivel Outlet with Serrated Tip/Add-on Nozzle (Left/Right Side Available)

Attributes	Details
Nozzle Outlet Type	Serrated tip (optional neoperl aerator)
Spout Options	Available in rigid or swing spout options
Handle	Available in left or right options
Hole Size	Φ21-23 mm





LAB26-TN

Laboratory Faucet with Serrated Tip

Attributes	Details
Nozzle Outlet Type	Serrated tip (optional neoperl aerator)
Hole Size	Φ21-23 mm

Knee Operated



BWFVATF
Delayed Flow Valve

+

SSKNV-B
Thermostatic Mixing Valve
(Optional)

SSKNV-A
Instant Flow Valve

+

SSKNV-B
Thermostatic Mixing Valve
(Optional)

Unit
(mm)

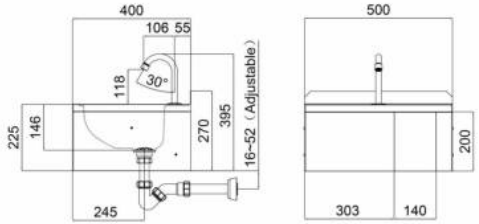

SSKNBS

Wall Mount Wash Sink (for Knee Operated)

Attributes	Details
Material	SUS304
Water Flow Mode	Available in delayed flow or instant flow mode options
Thermostatic Mixing Valve	Optional for hot and cold water mixing
Delayed Flow Time	Factory preset 6 or 16 seconds, adjustable from 6-16 seconds

Drinking Series



ABUBAB/ABUBAM
Sensor Drinking Bubbler

BUBMI-LH
Mini Manual Drinking Bubbler
- Lever Handle

BUBMI-PB
Mini Manual Drinking Bubbler
- Push Button

Chiller (Optional)

Filter (Optional)

Unit
(mm)

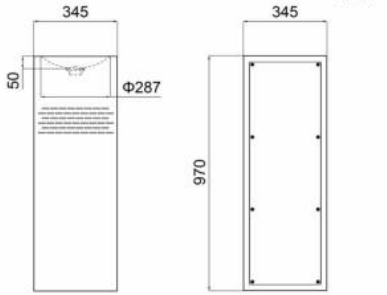

SSBS-C

Freestanding Wash Sink (for Drinking Bubbler)

Attributes	Details
Material	SUS304
Compatible Products	Drinking bubbler series
Product Size	970×345 mm (H×W), inner Φ287×50 mm (D)
Function	Available in chilled and filtered water options

Drinking Series

100% SUS304 WETTED PARTS



Unit (mm)

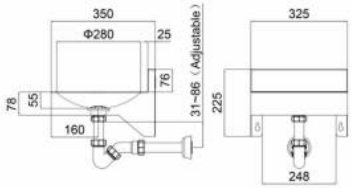

SSBS-A

Wall Mount Wash Sink
(for Drinking Bubbler)





ABUBAB/ABUBAM

Sensor Drinking Bubbler



BUBMI-LH

Mini Manual Drinking Bubbler - Lever Handle



BUBMI-PB

Mini Manual Drinking Bubbler - Push Button

Unit (mm)



SSBS-B

Wall Mount Wash Sink (for Drinking Bubbler)

Attributes	Details
Material	SUS304
Compatible Products	Drinking bubbler series
Product Size (SSBS-A)	225×325×350 mm (H×W×D), inner Φ280×50 mm (D)
Product Size (SSBS-B)	290×325×360 mm (H×W×D), inner Φ280×50 mm (D)

Drinking Series

100% SUS304 WETTED PARTS



SBLTFB/SBLTFM

Sensor Bottle Filler



BLTFLT1

Manual Bottle Filler - Lever Handle



ABUBAB/ABUBAM

Sensor Drinking Bubbler



BUBMI-LH

Mini Manual Drinking Bubbler - Lever Handle



BUBMI-PB

Mini Manual Drinking Bubbler - Push Button

Unit (mm)

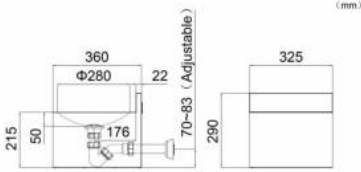

SSBS-D

Wall Mount Wash Sink (for Drinking Bubbler and Bottle Filler)

Attributes	Details
Material	SUS304
Compatible Products	Drinking bubbler and bottle filler series
Product Size	290×325×360 mm (H×W×D), inner Φ280×50 mm (D)

Drinking Series



BLTFL-PB
Manual Bottle Filler
- Push Button

BLTFLM-PB
Mini Manual Bottle Filler
- Push Button

ABUBAB/ABUBAM
Sensor Drinking Bubbler

BUBMI-LH
Mini Manual Drinking Bubbler
- Lever Handle

BUBMI-PB
Mini Manual Drinking Bubbler
- Push Button

F20

Wall Mount Wash Sink (for Drinking Bubbler and Bottle Filler)

Attributes	Details
Material	SUS304
Compatible Products	Drinking bubbler and bottle filler series
Product Size	650×325×360 mm (H×W×D), inner Φ280×50 mm (D)

Drinking Series



SBLTFLB/SBLTFLM
Sensor Wall Mount Bottle Filler

SLBLTFLB/SLBLTFLM
Sensor Wall Mount Bottle Filler

ABUBAB/ABUBAM
Sensor Drinking Bubbler

BUBMI-LH
Mini Manual Drinking Bubbler
- Lever Handle

BUBMI-PB
Mini Manual Drinking Bubbler
- Push Button

FONT 30

Wall Mount Wash Sink (for Drinking Bubbler and Bottle Filler)

Attributes	Details
Material	SUS304
Compatible Products	Drinking bubbler and bottle filler series
Product Size	744×325×360 mm (H×W×D), inner Φ280×50 mm (D)

Drinking Series

100% SUS304 WETTED PARTS



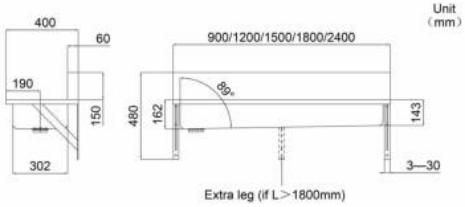



BUBS-PB
Manual Drinking Bubbler - Push Button



BUBS-LH
Manual Drinking Bubbler - Lever Handle



BUBS-CH
Manual Drinking Bubbler - Vandal Resistant Cross Handle



BUBL-PB
Manual Drinking Bubbler - Push Button



BUBL-LH
Manual Drinking Bubbler - Lever Handle



BUBL-CH
Manual Drinking Bubbler - Vandal Resistant Cross Handle

WT240

Wall Mount Wash Sink (for Drinking Bubbler)

Attributes	Details
Material	SUS304
Compatible Products	Drinking bubbler series
Product Size	W=900/1200/1500/1800/2400 mm, 480×400 mm (H×D)

Sensor Series

100% SUS304 WETTED PARTS







2DHMSTM
Sensor Multifunctional Faucet (2 in 1 Hand Washing and Soap Dispenser)



HMSTB/HMSTM
Sensor Faucet



DHMSTM
Sensor Faucet with Digital Temperature Control



THMSTSB
Sensor Faucet with Manual Temperature Control



ST210B
Sensor Faucet with Single Water Flow



ST210BD
Sensor Faucet with Dual Water Flow

FSS454732

Wall Mount Wash Sink (for Sensor Faucet)

Attributes	Details
Material	SUS304
Compatible Products	Sensor faucet series
Product Size	313×450×470 mm (H×W×D)

No	Overview	Details
1	4-in-1 Functionality	Combines chilled/sparkling/ambient/hot water (customizable to 2-in-1 or 3-in-1 functions)
2	Undercounter Installation	Maximizes countertop space with a sleek and elegant design
3	Continuous Efficient Chilling/Heating	Chilling capacity of 40 L/h, 1.5–2 times greater than typical market products; Heating features a breathing system, single continuous dispensing of hot water (≈4 L) at 90°C+, 3 times greater than typical market products, heating capacity of 18 L/h, ideal for offices, restaurants, etc.
4	Excellent Taste	Small molecule fusion technology, even CO_2 distribution for a rich, satisfying taste
5	Environmentally Sustainable	100% steam recovery, water-saving circulation, heat energy reuse, energy-saving, and emission reduction
6	Animated Display Screen	1.5-inch AMOLED smart HD display, user-friendly design, easy and comfortable operation
7	Safety	Independent dual-pipeline design for hot and cold water separation, built-in smart temperature control system to prevent burns and dry heating
8	Hygiene	Features an RO reverse osmosis filtration system, UV sterilization with 99.99% effectiveness, ensuring healthy and sanitary water quality
9	Temperature Adjustment	Meets various water temperature needs, cold water range 0°C-8°C, hot water range 45°C-98°C
10	Auto Shut-off Settings	Adjustable shut-off time (1-60 seconds) based on different cup sizes
11	User-friendly Design	3 times larger host button than typical market products, 45° ergonomic design for better visibility



Operation Instructions (Easy-to-use Rotary Knob Design)

- **Chilling/Sparkling/Ambient Water Mode**

  Turn On: Single press.

  Turn Off: Automatic water shut-off./Press again to shut off.

- **Hot Water Mode**

  Turn On: Double press within 0.5 seconds.

  Turn Off: Automatic water shut-off./Press again to shut off.

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

WATER DISPENSER

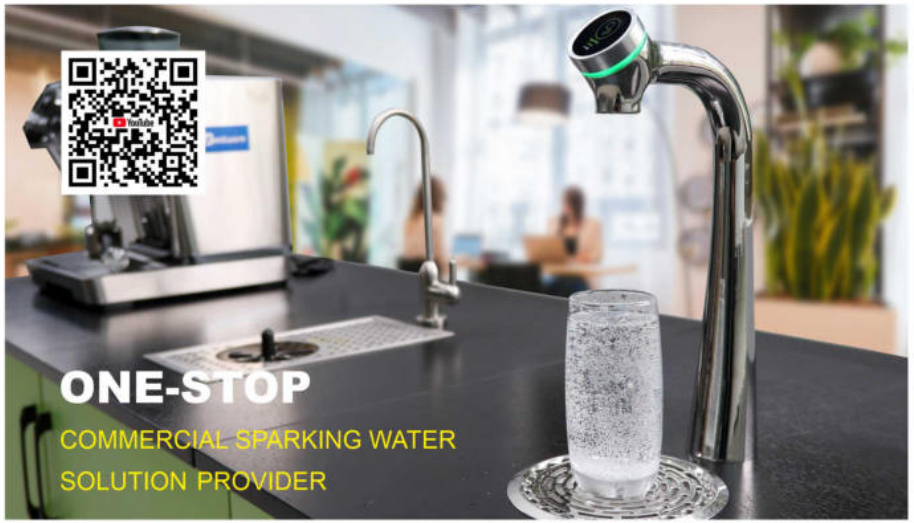

Only the tap is installed on the work surface, unit systems are concealed in the base cabinet.

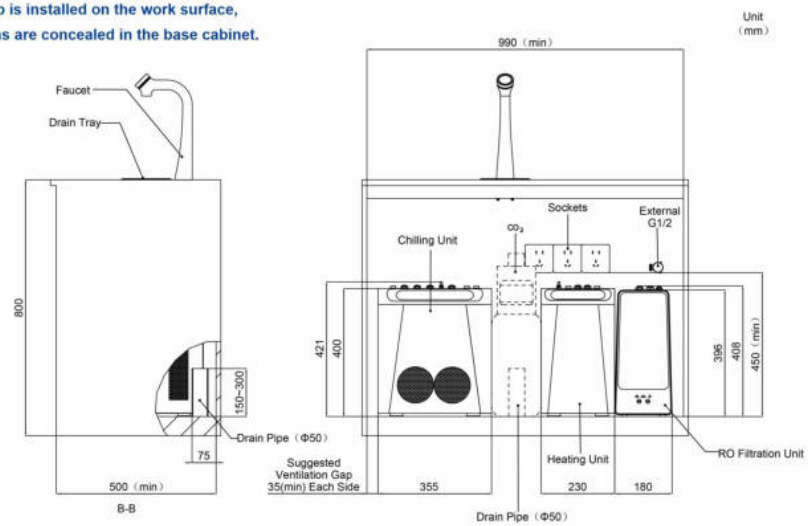

Available in 4-in-1, 3-in-1, or 2-in-1 functions

4 in 1



G1DS-123

Chilled/Sparkling/Ambient/Hot Water

3 in 1



G2DS-13

Chilled/Sparkling/Ambient Water



G3DS-124

Chilled/Ambient/Hot Water

2 in 1



G4DS-14

Chilled/Ambient Water



G5DS-15

Ambient/Hot Water

All models support optional RO filtration upgrade, see technical data table on the right.

Expertise in Stainless Steel
BESTWARE
PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

WATER DISPENSER

Technical Data

Overview	Details				
Model No.	G1DS-123	G2DS-13	G3DS-124	G4DS-14	G5DS-15
Types of Water	4 in 1	3 in 1	3 in 1	2 in 1	2 in 1
Chilled	●	●	●	●	–
Sparkling	●	●	–	–	–
Ambient	●	●	●	●	●
Hot	●	–	●	–	●
Faucet					
Tap incl. Drip Tray	●	●	●	●	●
Chilling Unit					
Chilling Power Rating: 450 W	●	●	●	●	–
Chilling Capacity: 40 L/h=200 cups/h (200 ml/cup)	●	●	●	●	–
Adjustable Temperature Range: 0°C–8°C	●	●	●	●	–
Sparkling Unit					
Sparkling Capacity: 40 L/h=200 cups/h (200 ml/cup)	●	●	●	–	–
Sparkling Water Concentration: 2.5–3.0 ppm	●	●	●	–	–
Heating Unit					
Heating Power Rating: 1200 W (110 V)/1500 W (220 V)	●	–	●	–	●
Heating Capacity: Single continuous dispensing (≈4 L) at 90°C+, 18 L/h=120 cups/h (150 ml/cup)	●	–	●	–	●
Adjustable Temperature Range: 45°C–98°C	●	–	●	–	●
Installation Info					
Tap incl. Drip Tray (W×D×H): 155×221×332 mm (Tap Size)/Φ125 mm (Drip Tray Size)	●	●	●	●	●
Max Counter Thickness: ≤42 mm (customizable to extra thickness)	●	●	●	●	●
Minimum Base Cabinet Size (W×D×H) (mm)	810×500×520	580×500×520	810×500×520	425×500×520	265×500×520
RO Filtration Unit	Optional Upgrade (RO unit requires 180 mm extra cabinet width)				

Faucet

Parameters	Detailed Specifications/Features
Size (Tap+Drip Tray)	158×223×332 mm (W×D×H)
Body Material	SUS304 plasma mirror polishing (unplated), corrosion-resistant, lead-free, and durable
Internal Pipe	Food-grade material, high/low temperature resistant
Aerator	Neoperl, SUS304, high/low temperature resistant, stable water output, smooth and dense flow of water with no splashing
Dual Pipeline	Independent dual pipeline design, isolating cold and hot water to ensure stable water temperature
Anti-scald Design	High-efficiency thermally insulated PP corrugated pipe, the tap surface remains cool and safe even with continuous high-temperature water output
Drip Tray (Wastewater Collection Area)	Φ132 mm, SUS304, collect overflow, remaining clean and tidy
Installation Size	1. Surface thickness required ≤42 mm (customizable to extra thickness) 2. Tap hole size required Φ32-35 mm 3. Drip tray hole size required Φ130 mm, 3×Φ8 mm installation holes

100% SUS304 WETTED PARTS





Automatic Water Shut-off Time Settings

Press and hold for 5 s to adjust (range 1-60 s)



Chilling Unit

Parameters	Detailed Specifications/Features
Water Dispensing Mode	Chilled water, sparkling water, ambient water
Material	Galvanized steel case, powder coating (white)
Size	355×460×421 mm (W×D×H)
Chilling Power Rating	450 W
Chilling Capacity	40 L/h=200 cups/h (200 ml/cup), fresh water circulation
Sparkling Capactity	40 L/h=200 cups/h (200 ml/cup), Max 3 L/min, with pressure reducing valve, stable flow, anti-splash
Sparkling Water Concentration	2.5-3.0 ppm, with a built-in CO_2 and water mixing chamber, rich in taste (CO_2 cylinder to be provided by the user)
CO_2 Intake Pipe	¼" PE
Adjustable Temperature Range	0°C-8°C
Supply Voltage	Available in both 110 V/60 Hz and 220 V/50 Hz power supply specifications
Water Pressure Range	0.15 MPa-0.7 Mpa
UV Sterilization	External design, sterilization rate reaches 99.99%, easy maintenance
High-pressure Relief Port	Equipped with pressure relief function, increasing safety
Water Inlet/Outlet Interface	¼", universal connectors, easy installation
Communication Interface	Shares with heating unit and faucet

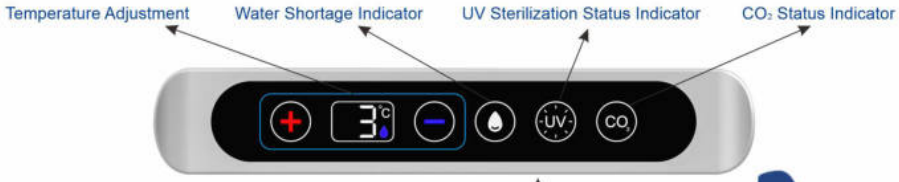

Capacitive Touch Buttons

- 3 times larger capacitive touch buttons than typical market products.
- 45° ergonomic slope design enhancing the visual experience.

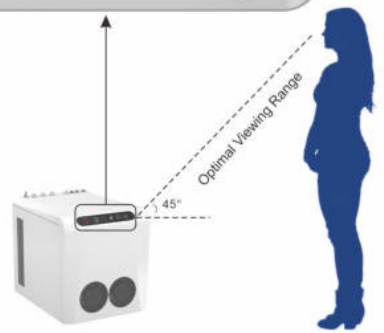

Heating Unit

Product Parameters	Detailed Specifications/Features
Water Dispensing Mode	Hot water
Material	Galvanized steel case, powder coating (white)
Size	230×320×421 mm (W×D×H)
Heating Power Rating	1200 W (110V)/1500 (220V)
Heating Capacity	Single continuous dispensing (≈4 L) at 90°C+, 18 L/h=120 cups/h (150 ml/cup)
Adjustable Temperature Range	45°C-98°C
Supply Voltage	Available in both 110 V/60 Hz and 220 V/50 Hz power supply specifications
Water Pressure Range	0.15 MPa-0.7 Mpa
UV Sterilization	External design, sterilization rate reaches 99.99%, easy maintenance
High-pressure Relief Port	Equipped with pressure relief function, increasing safety
Water Inlet/Outlet Interface	¼", universal connectors, easy installation
Communication Interface	Shares with chilling unit and faucet



Available in 3 Energy-saving Modes

- **Standard Mode**
  Maintains set temperature with auto-reheat (5°C drop), auto power-off after 24 h of inactivity, reheats upon reuse.
- **Insulated Energy-saving Mode**
  Maintains set temperature with auto-reheat (5°C drop), auto drop to 65°C after 3 h of inactivity, auto power-off after 24 h of inactivity, reheats upon reuse.
- **Energy-efficient Mode**
  Maintains set temperature with auto-reheat (5°C drop), auto power-off after 3 h of inactivity, reheats upon reuse.

Ro Filtration Unit

Filtration Capacity

RO filtration effectively removes harmful impurities such as heavy metals, bacteria, viruses, antibiotics, and pesticides, while reducing water scale buildup to prevent it from affecting heating speed and water flow, extending the equipment's lifespan and improving operational efficiency.



Water Flow

Flow rate of 2.6 L/min, fast water filling with high flow, saving time.

Filter Cartridge Lifespan

RO Filter 1000 G (2-year lifespan or 4000 L)
PAC Composite Filter (1-year lifespan or 2000 L)
Filter replacement reminder ensures water quality.

No Water Storage Design

Saves space with a no-storage RO design, preventing bacterial growth, ensuring fresh, healthy water.

