

American Standard Style Deck Mount

Model No.: AA112

- **75%** Less Strain
- **3X** Rinsing Efficiency
- **50%** Faster Installation
- **5X** Longer Lifespan

100%
SUS304
WETTED PARTS



Hose

- Heat-resistant up to 95 °C
- Dual 360° swivel head and universal joint
- Tensile strength up to 155 kgs

Stainless Steel Spray Valve

Patented Dual-function Model

- Rotary switch (powerful and large-area washing)
- Reduces at least 75% muscle strain



Powerful Washing



Large-area Washing

Single-function Model

- Single powerful washing
- Reduces at least 75% muscle strain



Single Powerful Washing

Stainless Steel Rapid Screw Valve Core

- Tested for over 200,000 switch cycles (under high-temperature and high-pressure)



Website




YouTube



WhatsApp



Wechat

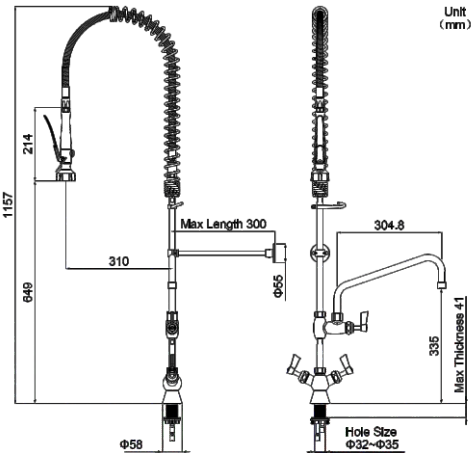

Attributes	Details
Model No.	AA112
Style	American Standard Style
Body Mount	Single Hole Deck Mount
Hole Size	Φ32-35 mm
Height	1157 mm
Body Material	304 Stainless Steel
Valve Core	304 Stainless Steel Rapid Screw
Spray Valve	Available in Stainless Steel Dual-function or Single-function Options
Hose	SUS304, 360° Swivel Head With Ball Joint (925 mm)
Overhead Spring	304 Stainless Steel
Temperature Control	Dual-handles Dual-control Hot and Cold Adjustment
Add-on Swing Nozzle	304 Stainless Steel, 12" = 304.8 mm
Neoperl Aerator Water Flow	Available in 2.11 GPM(8 LPM) or 3.96 GPM(15 LPM) Options
Wall Bracket	Yes
Temperature Max	95°C(203°F)
Pressure Max	2.5 Mpa (25 Bar)
Life Span	200,000+ Cycles



Website



YouTube



WhatsApp



Wechat