

American Standard Style Deck Mount

Model No.: AS112

- **75%** Less Strain
- **3X** Rinsing Efficiency
- **50%** Faster Installation
- **5X** Longer Lifespan



Hose

- Heat-resistant up to 95 °C
- Dual 360° swivel head and universal joint
- Tensile strength up to 155 kgs

Stainless Steel Spray Valve

Patented Dual-function Model

- Rotary switch (powerful and large-area washing)
- Reduces at least 75% muscle strain



Powerful Washing



Large-area Washing

Single-function Model

- Single powerful washing
- Reduces at least 75% muscle strain



Single Powerful Washing

Stainless Steel Rapid Screw Valve Core

- Tested for over 200,000 switch cycles (under high-temperature and high-pressure)



Website



YouTube




WhatsApp



Wechat

BESTWARE Hardware Production Co., Ltd.
Block 8, NO. 6, Jianda Nan Rd., Jiangmen, Guangdong,
China 529000 www.bestware-stainless.com

Email: business@bestware-stainless.com Tel: +86 750 3108801
WhatsApp: +86 18929047065 Wechat: +86 18929047065

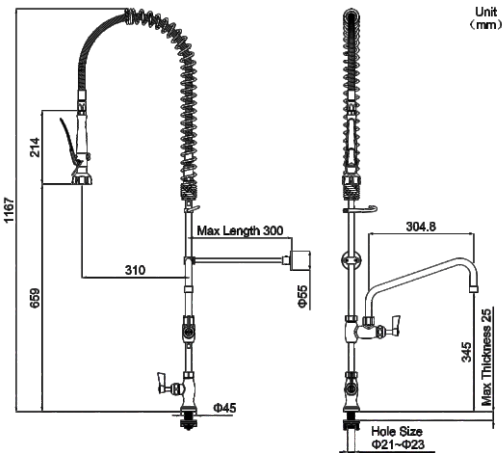

Attributes	Details
Model No.	AS112
Style	American Standard Style
Body Mount	Single Hole Deck Mount
Hole Size	Φ21-23 mm
Height	1167 mm
Body Material	304 Stainless Steel
Valve Core	304 Stainless Steel Rapid Screw
Spray Valve	Available in Stainless Steel Dual-function or Single-function Options
Hose	Stainless Steel 360° Rotating and Universal Ball Joint (925 mm)
Overhead Spring	304 Stainless Steel
Temperature Control	Single-handle Single-control Cold Water Only
Add-on Swing Nozzle	304 Stainless Steel, 12" = 304.8 mm
Neoperl Aerator Water Flow	Available in 2.11 GPM(8 LPM) or 3.96 GPM(15 LPM) Options
Wall Bracket	Yes
Temperature Max	95°C(203°F)
Pressure Max	2.5 Mpa (25 Bar)
Life Span	200,000+ Cycles



Website



YouTube



WhatsApp



Wechat

BESTWARE Hardware Production Co., Ltd.
Block 8, NO. 6, Jianda Nan Rd., Jiangmen, Guangdong,
China 529000 www.bestware-stainless.com

Email: business@bestware-stainless.com Tel: +86 750 3108801
WhatsApp: +86 18929047065 Wechat: +86 18929047065