

European Standard Style Wall Mount

Model No.: EW250

- **75%** Less Strain
- **3X** Rinsing Efficiency
- **50%** Faster Installation
- **5X** Longer Lifespan



Hose


- Heat-resistant up to 95 °C
- Dual 360° swivel head and universal joint
- Tensile strength up to 155 kgs



Stainless Steel Spray Valve


Patented Dual-function Model

- Rotary switch (powerful and large-area washing)
- Reduces at least 75% muscle strain

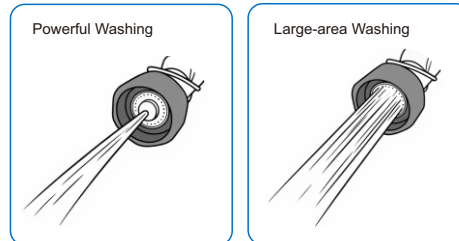

Single-function Model

- Single powerful washing
- Reduces at least 75% muscle strain



Stainless Steel Slow-opening Valve Core

- Tested for over 200,000 switch cycles (under high-temperature and high-pressure)
- 50% lighter operation (compared to similar products)



Website




YouTube



WhatsApp



Wechat

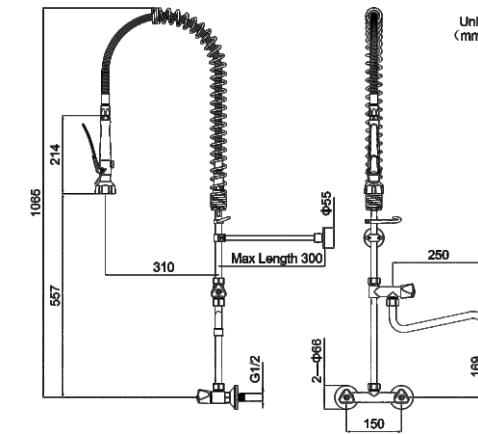

| Attributes | Details |
|----------------------------|---|
| Model No. | EW250 |
| Style | European Standard Style |
| Body Mount | Dual Holes Wall Mount |
| Hole Size | G1/2, Hole-to-hole Dimension 5.91"(150mm) |
| Height | 1065 mm |
| Body Material | 304 Stainless Steel |
| Valve Core | 304 Stainless Steel Slow-opening |
| Spray Valve | Available in Stainless Steel Dual-function or Single-function Options |
| Hose | Stainless Steel 360° Rotating and Universal Ball Joint (925 mm) |
| Overhead Spring | 304 Stainless Steel |
| Temperature Control | Dual-handles Dual-control Hot and Cold Adjustment |
| Add-on Swing Nozzle | 304 Stainless Steel, 250 mm (≈ 9.84") |
| Neoperl Aerator Water Flow | Available in 2.11 GPM(8 LPM) or 3.96 GPM(15 LPM) Options |
| Wall Bracket | Adjustable Range 300 mm |
| Temperature Max | 95°C(203°F) |
| Pressure Max | 2.5 Mpa (25 Bar) |
| Life Span | 200,000+ Cycles |



Website



YouTube



WhatsApp



Wechat