



Series Catalog



## BESTWARE Hardware Production Co., Ltd.

Add: Block 8, No.6, Jianda Nan Road, Jiangmen, Guangdong, China

Email: [business@bestware-stainless.com](mailto:business@bestware-stainless.com)    [after-sales@bestware-stainless.com](mailto:after-sales@bestware-stainless.com)

WhatsApp: +86 18929047065    Tel: +86 750 3108801

Wechat: +86 18929047065



Website



YouTube



WhatsApp



Wechat

2025 V1.0

Expertise in Stainless Steel

# COMMERCIAL SPARKING WATER DISPENSER

PREMIER SOLUTION PROVIDER OF ONE-STOP STAINLESS COMMERCIAL FAUCETS

[www.bestware-stainless.com](http://www.bestware-stainless.com)

# CONTENTS

## COMMERCIAL SPARKLING WATER DISPENSER

Sparkling 02

Hot and Pure 09

### ✓ Product Advantages

Since its establishment, Bestware has always adhered to the principle of "solving industry pain points through product selling points", creating more value for customers. Below is an overview of our unique selling points.



Commercial Sparkling Water Dispenser

| Pain Points                                      | Selling Points   |
|--|--|
| Limited Functionality, Requires Multiple Devices | Multi-function for Hot/Chilled/Sparkling/Ambient Water (4 in 1)  |
| Low Water Output, Unsuitable for Commercial Use  | 200 cups/h Chilled Water (200 ml/cup), Serving Commercial Needs  |
| Poor Taste of Sparkling Water                    | Advanced Molecular Fusion for Smooth, Lasting Sparkling Taste    |
| Lack of Energy-saving Design, Leading to Waste   | Steam Recovery System for Energy Savings and Reduced Consumption |
| Lacking Safety Protection, Burn Hazard           | Insulated Dual Pipelines for Heat Retention, Keeping Faucet Cool |

### ✓ Our Commitments

**97%+** Product Satisfaction Upon Receipt by Customers

**100%** 304/316 Stainless Steel (Unless Specified Otherwise)

**100%** Product Qualification Rate at Factory Shipment

**100%** Customer Complaint Resolution Rate




**Take Bestware for a spin, and it'll be your go-to forever!**

# WATER DISPENSER


EXPERTISE IN STAINLESS STEEL  
**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

## G1DS1023

Commercial Sparkling Water Dispenser with Standalone RO Filtration

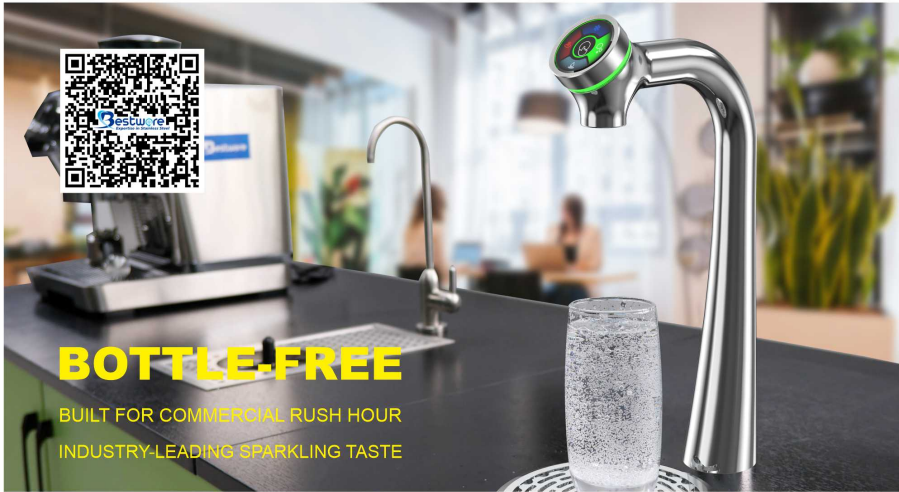

Only the tap is installed on the work surface, unit systems are concealed in the base cabinet.

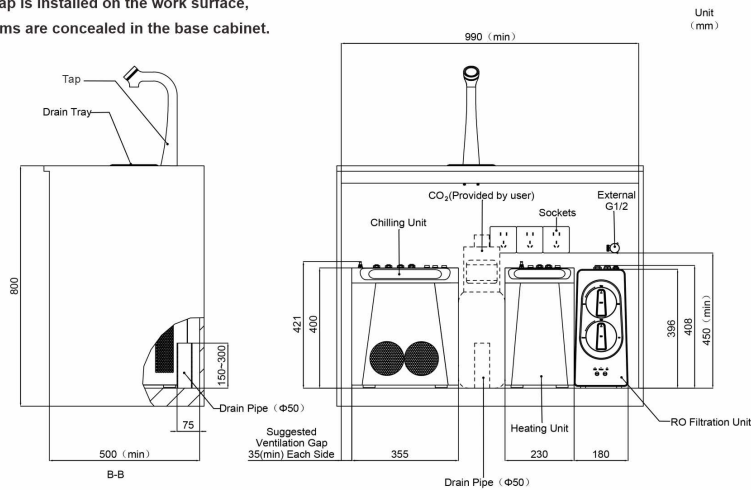

EXPERTISE IN STAINLESS STEEL

**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

# SPARKLING

| No | Overview                  | Details   |
|----|---------------------------|---|
| 1  | 4-in-1 Functionality      | <ol style="list-style-type: none"> <li>4-in-1 Functionality: Hot, Chilled, Sparkling, and Ambient Water</li> <li>Customizable 2-in-1 or 3-in-1 Configurations</li> </ol>  |
| 2  | Excellent Taste           | <ol style="list-style-type: none"> <li>Independent Four-tube Structure Keeps Each Water Type Separate, Ensuring Pure Taste</li> <li>Sparkling Water Delivers Fine, Lasting Bubbles (2.5–3.5 g/L) via Gas-liquid Fusion Technology</li> </ol>  |
| 3  | High Water Output         | <ol style="list-style-type: none"> <li>Chilled/sparkling Water: 40 L/h (&lt;10°C); Hot Water: 18 L/h (&gt;90°C)</li> <li>4× Chilling Capacity Meets Commercial Peak Demand</li> <li>Single-serving Output: Hot 4 L, Chilled 1 L, Sparkling 3 L</li> </ol>   |
| 4  | Superior User Experience  | <ol style="list-style-type: none"> <li>1.5-inch OLED HD Animated Display for Intuitive Operation</li> <li>High-flow Design Meets Peak Demand, Reducing Waiting Time and Improving Service Efficiency</li> <li>Adjustable Temperature: Chilled 0–8°C, Hot 45–98°C, Suitable for Multiple Scenarios</li> <li>Drip-free Sparkling Water Dispensing for Clean Operation</li> <li>Adjustable Dispensing Time: 1–60 s for Different Cup Sizes</li> <li>Enlarged Buttons for Easy Operation</li> <li>45° Ergonomic Viewing Angle for Convenient Maintenance without Bending</li> <li>Neoperl Aerator Ensures Smooth, Splash-free Water Flow</li> <li>Drip Tray with Large Drainage Holes for Fast Drainage, No Water Accumulation</li> </ol> |
| 5  | Hygiene                   | <ol style="list-style-type: none"> <li>UV Sterilization &gt;99.99% Ensures Clean, Safe Water</li> <li>Laminar-flow Heating Separates Hot and Cold Water, Preventing "Mixed Water"</li> <li>In-line Immersion Chilling Provides On-demand Chilled Water, Keeping It Fresh</li> </ol>   |
| 6  | Energy Saving             | <ol style="list-style-type: none"> <li>Breathing System Recovers 100% Steam for Efficient Heat Reuse and Water Saving</li> <li>Three Energy-saving Modes Automatically Reduce Consumption during Off-peak Hours</li> <li>On-demand Cooling Reduces Refrigeration Energy</li> <li>Sparkling Water Line Stops Instantly without Dripping, Avoiding Waste</li> <li>Air-cooled System Delivers Low-power, Efficient Chilling and Water Saving</li> </ol>  |
| 7  | Safety                    | <ol style="list-style-type: none"> <li>PP Corrugated Tube Prevents the Faucet Surface Overheating, Avoiding Scalding</li> <li>Water-level Sensor and Smart Temp Control Shut Off Unit at Low Water to Prevent Dry Burn</li> <li>Double-tap Hot Water Dispensing Prevents Accidental Scalding</li> </ol>   |
| 8  | Smart Features            | <ol style="list-style-type: none"> <li>1.5-inch OLED Display Supports Water Mode Switching and Dispensing Time Setting</li> <li>Sensors Ensure Precise Temperature and Water-level Control, Preventing Dry Burn</li> <li>Three Energy-saving Modes Reduce Off-peak Energy Consumption and Operational Costs</li> </ol>  |
| 9  | Stylish Appearance        | <ol style="list-style-type: none"> <li>Streamlined Faucet Design, 100% SUS304 with Plasma Mirror Finish, Lead-free and Safe</li> <li>Uniform Cabinet Design, Minimalist and Stylish, Perfectly Fits Modern Commercial Spaces</li> </ol>   |
| 10 | Undercounter Installation | <ol style="list-style-type: none"> <li>Frees up Countertop Space for a Clean, Spacious Look</li> <li>Separate Chilling and Heating Units Optimize Under-counter Utilization</li> </ol>  |

# SPARKLING

EXPERTISE IN STAINLESS STEEL  
**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

## » Tap

| Parameters                             | Detailed Specifications/Features   |
|--|--|
| Size (Tap+Drip Tray)                   | 158×223×332 mm (W×D×H)   |
| Body Material                          | SUS304 Plasma Mirror Polishing (Unplated), Corrosion-resistant, Lead-free, and Durable   |
| Internal Tube                          | Food-grade Material, High/Low Temperature Resistant  |
| Aerator                                | Neoperl, SUS304, High/Low Temperature Resistant, Stable Water Output, Smooth and Dense Flow of Water with No Splashing   |
| Four-tube System                       | Independent 4-tube Design, Isolating Cold and Hot Water to Ensure Stable Water Temperature   |
| Anti-scald Design                      | High-efficiency Thermally Insulated PP Corrugated Tube, the Tap Surface Remains Cool and Safe Even with Continuous High-temperature Water Output                                     |
| Drip Tray (Wastewater Collection Area) | Φ158 mm, SUS304, Collect Overflow, Remaining Clean and Tidy  |
| Installation Size                      | 1. Surface Thickness Required ≤42 mm (Customizable to Extra Thickness)<br>2. Tap Hole Size Required Φ32-35 mm<br>3. Drip Tray Hole Size Required Φ130 mm, 3×Φ8 mm Installation Holes |




### Operation Instructions (Easy-to-use Rotary Knob Design)



### Automatic Water Shut-off Time Settings

Press and hold for 5 s to adjust (range 1-60 s)

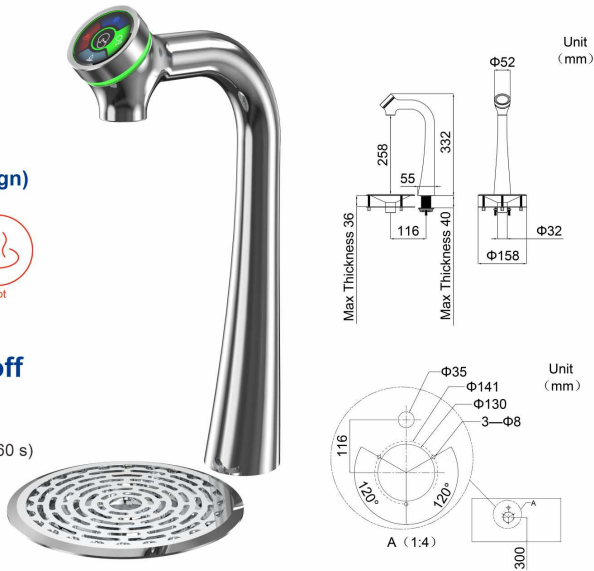

EXPERTISE IN STAINLESS STEEL

**BESTWARE**

ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

# SPARKLING

## » Chilling Unit


| Parameters                    | Detailed Specifications/Features   |
|-------------------------------|--|
| Water Dispensing Mode         | Chilled Water, Sparkling Water, Ambient Water  |
| Material                      | 304 Stainless Steel  |
| Cabinet Handle                | Yes  |
| Size                          | 355×464×438 mm (W×D×H)   |
| Chilling Power Rating         | 520 W  |
| Chilling Capacity             | 40 L/h=200 cups/h (200 ml/cup), Fresh Water Circulation  |
| Sparkling Capacity            | 40 L/h=200 cups/h (200 ml/cup), Max 3 L/min, with Pressure Reducing Valve, Stable Flow, Anti-splash  |
| Sparkling Water Concentration | 2.5-3.5 g/L, with a Built-in CO <sub>2</sub> and Water Mixing Chamber, Rich in Taste (CO <sub>2</sub> Cylinder to be Provided by the User) |
| CO <sub>2</sub> Intake Tube   | 1/4" PE  |
| Adjustable Temperature Range  | 0°C-8°C  |
| Supply Voltage                | Available in Both 110 V/60 Hz and 220 V/50 Hz Power Supply Specifications  |
| Water Pressure Range          | 0.15 MPa-0.6 Mpa   |
| UV Sterilization              | External Design, Sterilization Rate Reaches 99.99%, Easy Maintenance   |
| High-pressure Relief Port     | Equipped with Pressure Relief Function, Increasing Safety  |
| Water Inlet/Outlet Connection | 1/4", Universal Connectors, Easy Installation  |
| Communication Interface       | Shares with Heating Unit and Tap   |

Temperature Adjustment    Water Shortage Indicator    UV Sterilization Status Indicator    CO<sub>2</sub> Status Indicator




### Capacitive Touch Buttons

- 3 times larger capacitive touch buttons than typical market products.
- 45° ergonomic slope design enhancing the visual experience.

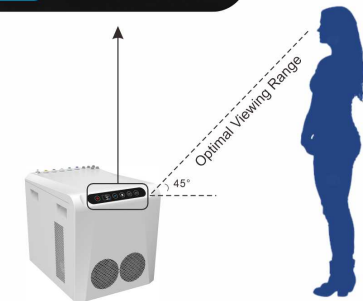


» Heating Unit

| Product Parameters            | Detailed Specifications/Features   |
|-------------------------------|--|
| Water Dispensing Mode         | Hot Water  |
| Material                      | 304 Stainless Steel  |
| Cabinet Handle                | Yes  |
| Size                          | 230×322×438 mm (W×D×H)   |
| Heating Power Rating          | 1200 W (110 V)/1500 W (220 V)  |
| Heating Capacity              | Single Continuous Dispensing (≈4 L) at 90°C+, 18 L/h=120 cups/h (150 ml/cup) |
| Adjustable Temperature Range  | 45°C-98°C  |
| Supply Voltage                | Available in Both 110 V/60 Hz and 220 V/50 Hz Power Supply Specifications    |
| Water Pressure Range          | 0.15 MPa-0.6 Mpa   |
| UV Sterilization              | External Design, Sterilization Rate Reaches 99.99%, Easy Maintenance         |
| High-pressure Relief Port     | Equipped with Pressure Relief Function, Increasing Safety                    |
| Water Inlet/Outlet Connection | 3/8" Inlet, 1/4" Outlet, Easy Installation                                   |
| Communication Interface       | Shares with Chilling Unit and Tap  |

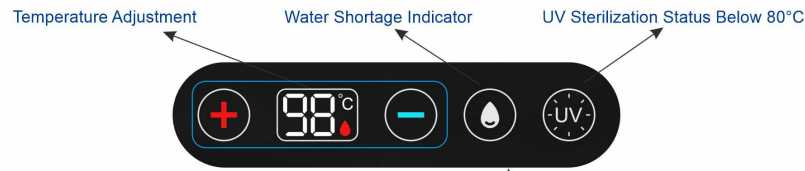

Available in 3 Energy-saving Modes

- Standard Energy-saving Mode**  
 Maintains set temperature with auto-reheat (5°C drop), auto power-off after 24 h of inactivity, reheats upon reuse.
- Insulated Energy-saving Mode**  
 Maintains set temperature with auto-reheat (5°C drop), auto drop to 65°C after 3 h of inactivity, auto power-off after 24 h of inactivity, reheats upon reuse.
- High-efficiency Energy-saving Mode**  
 Maintains set temperature with auto-reheat (5°C drop), auto power-off after 3 h of inactivity, reheats upon reuse.

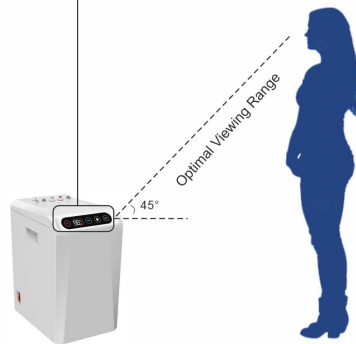

» Ro Filtration Unit

Filtration Capacity

RO filtration effectively removes harmful impurities such as heavy metals, bacteria, viruses, antibiotics, and pesticides, while reducing water scale buildup to prevent it from affecting heating speed and water flow, extending the equipment's lifespan and improving operational efficiency.



Water Flow

Flow rate of 2.6 L/min, fast water filling with high flow, saving time.

Filter Cartridge Lifespan

RO Filter 1000 G (2-year lifespan or 8000 L)  
 PAC Composite Filter (1-year lifespan or 4000 L)  
 Filter replacement reminder ensures water quality.

No Water Storage Design

Saves space with a no-storage RO design, preventing bacterial growth, ensuring fresh, healthy water.



SPARKLING

EXPERTISE IN STAINLESS STEEL  
**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

**Additional Combination Configurations  
 Available upon Request**

**4 in 1**

**G1DS-123**

Chilled/Sparkling/Ambient/Hot Water



**3 in 1**

**G2DS-13**

Chilled/Sparkling/Ambient Water



EXPERTISE IN STAINLESS STEEL

**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

SPARKLING

**Technical Data**

| Overview  | Details          |             |
|---|------------------|-------------|
| Model No.   | G1DS-123         | G2DS-13     |
| Types of Water  | 4 in 1<br>       | 3 in 1<br>  |
| Chilled   | •                | •           |
| Sparkling   | •                | •           |
| Ambient   | •                | •           |
| Hot   | •                | -           |
| <b>Faucet</b>   |                  |             |
| Tap incl. Drip Tray   | •                | •           |
| <b>Chilling Unit</b>  |                  |             |
| Chilling Power Rating: 520 W  | •                | •           |
| Chilling Capacity: 40 L/h=200 cups/h (200 ml/cup)   | •                | •           |
| Adjustable Temperature Range: 0°C-8°C   | •                | •           |
| <b>Sparkling Unit</b>   |                  |             |
| Sparkling Capacity: 40 L/h=200 cups/h (200 ml/cup)  | •                | •           |
| Sparkling Water Concentration: 2.5-3.5 g/L  | •                | •           |
| <b>Heating Unit</b>   |                  |             |
| Heating Power Rating: 1200 W (110 V)/1500 W (220 V)   | •                | -           |
| Heating Capacity:<br>Single Continuous Dispensing (=4 L) at 90°C+, 18 L/h=120 cups/h (150 ml/cup) | •                | -           |
| Adjustable Temperature Range: 45°C-98°C   | •                | -           |
| <b>Installation Info</b>  |                  |             |
| Tap incl. Drip Tray (W×D×H): 158×223×332 mm (Tap Size)/Φ125 mm (Drip Tray Size)                   | •                | •           |
| Max Counter Thickness: ≤42 mm (Customizable to Extra Thickness)                                   | •                | •           |
| <b>Standalone RO Filtration Unit</b>  | Optional Upgrade |             |
| Minimum Base Cabinet Size (W×D×H) (mm)  | 810×500×520      | 580×500×520 |
| Remark: RO Unit Requires 180 mm Extra Cabinet Width   |                  |             |


Additional Dispensing Configurations Can be Customized upon Request. Contact Our Sales Team for More Information.

HOT AND PURE


EXPERTISE IN STAINLESS STEEL  
**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

**G12DS-19**

Commercial Water Dispenser with Built-in RO Filtration

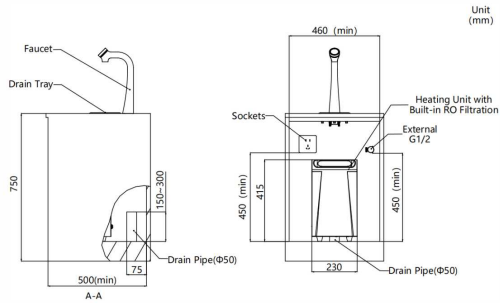

Unit (mm)

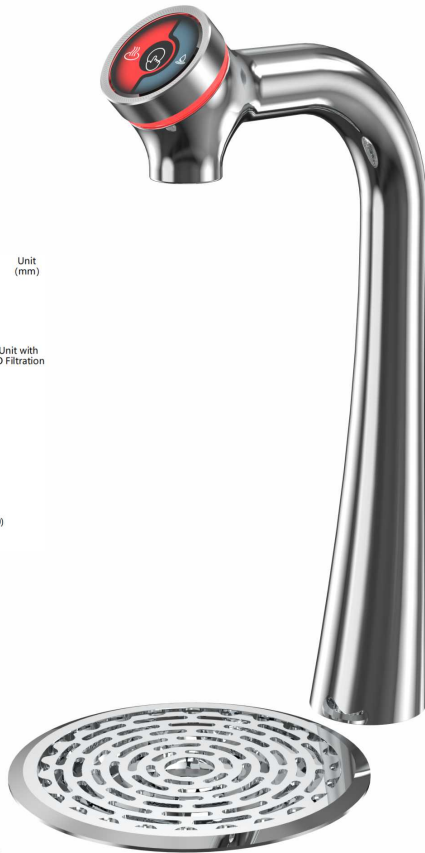

Only the tap is installed on the work surface, unit systems are concealed in the base cabinet.

**Automatic Water Shut-off Time Settings**

Press the knob and hold for 5 seconds to enter the settings mode. The automatic water shut-off time can be adjusted (1-60s).

EXPERTISE IN STAINLESS STEEL

**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

HOT AND PURE

| No | Overview                     | Details  |
|----|------------------------------|--|
| 1  | Function                     | Combines Ambient/Hot Water with Purification   |
| 2  | Undercounter Installation    | Maximizes Countertop Space with a Sleek and Elegant Design   |
| 3  | Continuous Efficient Heating | Single Continuous Dispensing of Hot Water (≈1L) at 90°C+, Ideal for Hotel Rooms  |
| 4  | Environmentally Sustainable  | Eliminating Bottled Water Reduces Packaging Waste and Carbon Emissions   |
| 5  | Animated Display Screen      | 1.5-inch OLED Smart HD Display, User-friendly Design, Easy and Comfortable Operation   |
| 6  | Safety                       | Independent Dual-tube Design for Hot and Ambient Water Separation, Built-in Smart Temperature Control System to Prevent Burns and Dry Heating      |
| 7  | Hygiene                      | Features an RO Filter System, UV Sterilization with 99.99% Effectiveness, Ensuring Healthy and Sanitary Water Quality                              |
| 8  | Auto Shut-off Settings       | Users Can Set Automatic Shut-off time (1-60 seconds) Based on Different Cup Sizes  |
| 9  | User-friendly Design         | Host Button Size is Three Times Larger than Average Products on the Market, Combined with a 45° Ergonomic Design for an Enhanced Visual Experience |



**Instant Hot**  
 Always Pure

HOT AND PURE


EXPERTISE IN STAINLESS STEEL  
**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

» Tap

| Parameters                             | Detailed Specifications/Features   |
|--|--|
| Size (Tap+Drip Tray)                   | 155×221×332 mm (W×D×H)   |
| Body Material                          | SUS304 Plasma Mirror Polishing (Unplated), Corrosion-resistant, Lead-free, and Durable   |
| Internal Tube                          | Food-grade Material, High/Low Temperature Resistant  |
| Aerator                                | Neoperl, SUS304, High/Low Temperature Resistant, Stable Water Output, Smooth and Dense Flow of Water with No Splashing   |
| Dual-tube System                       | Independent 2-tube Design, Separating Ambient and Hot Water to Prevent Cross-contamination   |
| Anti-scald Design                      | High-efficiency Thermally Insulated PP Corrugated Tube, the Tap Surface Remains Cool and Safe Even with Continuous High-temperature Water Output                                     |
| Drip Tray (Wastewater Collection Area) | Φ158 mm, SUS304, Collect Overflow, Remaining Clean and Tidy  |
| Installation Size                      | 1. Surface Thickness Required ≤42 mm (Customizable to Extra Thickness)<br>2. Tap Hole Size Required Φ32-35 mm<br>3. Drip Tray Hole Size Required Φ130 mm, 3×Φ8 mm Installation Holes |

Easy-to-use Rotary Knob Design

1.5-inch OLED intelligent control, high-definition display.

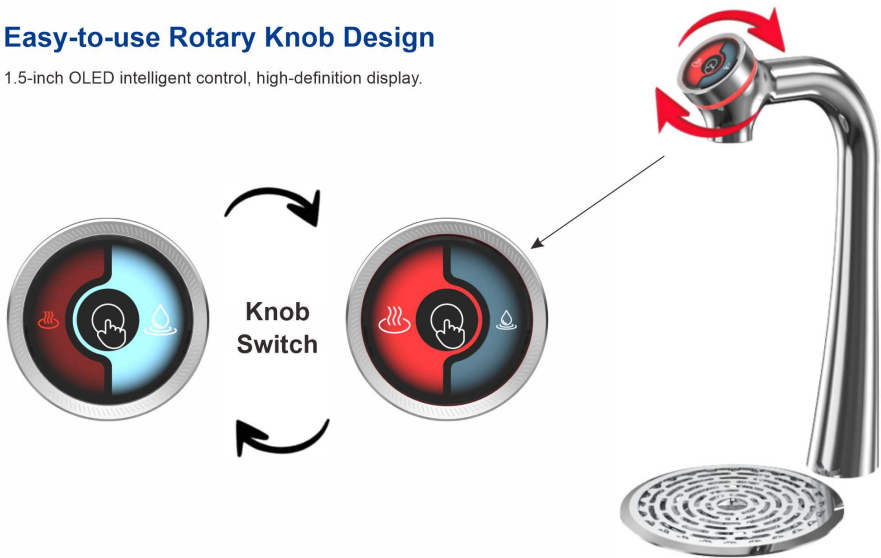

EXPERTISE IN STAINLESS STEEL

**BESTWARE**  
 ONE-STOP SOLUTION PROVIDER OF STAINLESS COMMERCIAL FAUCETS

HOT AND PURE

» Heating Unit

| Parameters                         | Detailed Specifications/Features   |
|------------------------------------|--|
| Water Dispensing Mode              | Hot Water, Ambient Water   |
| Material                           | 304 Stainless Steel  |
| Size                               | 230×320×438 mm (W×D×H)   |
| Heating Power Rating               | 1100 W (220 V)/1100 W (110 V)  |
| Heating Capacity                   | Single Continuous Dispensing of Hot Water (≈1.4 L) at 90°C+, 13 L/h, ≈120 cups/h (85 ml/cup)   |
| Supply Voltage                     | Available in Both 110 V/60 Hz and 220 V/50 Hz Power Supply Specifications  |
| Water Pressure Range               | 0.15 MPa-0.6 Mpa   |
| UV Sterilization                   | External Design, Sterilization Rate Reaches 99.99%, Easy Maintenance   |
| High-pressure Relief Port          | Equipped with Pressure Relief Function, Increasing Safety  |
| Water Inlet/Outlet Connection      | 3/8" Inlet, 1/4" Outlet, Easy Installation   |
| Communication Interface            | Shares with Heating Unit and Tap   |
| Built-in Filter Cartridge Lifespan | RO Filter: 50 h of Cumulative Water Production or 17,280 h of Power-on Time<br>PAC Composite Filter: 25 h of Cumulative Water Production or 4,320 h of Power-on Time |

